


Implementation of the Different Detector Concepts in Mokka Simulation Framework

Snowmass
August 2005, DESY

Valeri Saveliev
Obninsk State University / DESY, Hamburg

ILC Detector Concepts


LDC

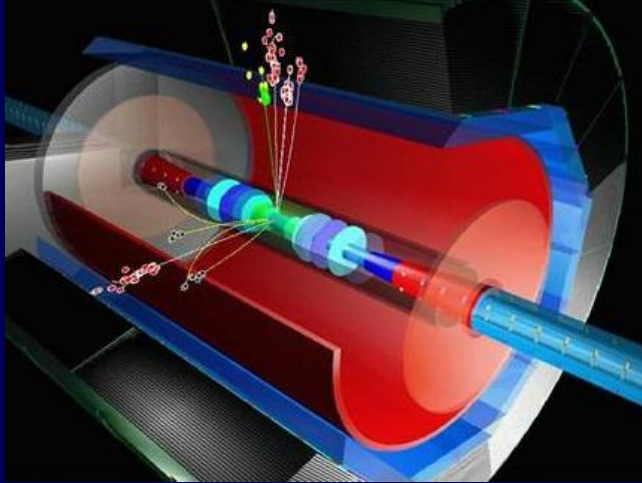

SiD



GLD

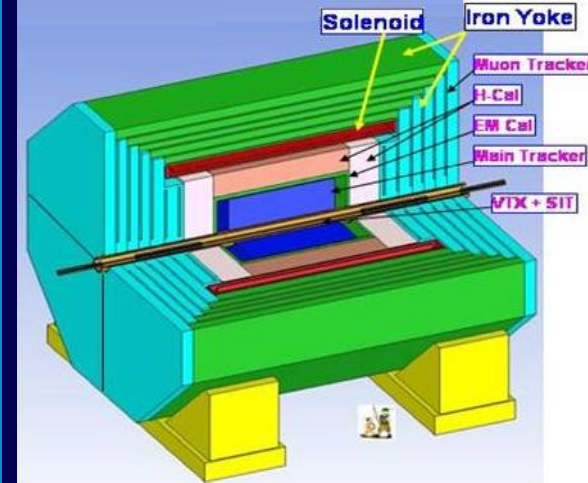


- $Zh \rightarrow ll+h$
 - $Br h \rightarrow bb, cc, gg$
 - $Zhh \rightarrow qqbbbb$
 - $h\nu\nu$
- a lot of other physics
- Precise momentum Resolution,
 - Excellent Vertex/Flavor Identification,
 - Excellent Calorimetry, Particle Flow Algorithm,
 - Excellent Hermeticity, Missing Mass Resolution,

ILC Detector Concepts


	LDC	SiD	GLD
• Vertex Detector		Si technology, geometry is practically the same	
• Intermedia and Forward Tracking		Si technology, geometry is practically the same	
• Main Tracker		TPC + Add Si Trackers Si technology	
• Calorimetry		TPC + EM:W/Si technology	
		Had: Fe/Sc technology Crystal	
• Muon system			

ILC Detector (LCD)

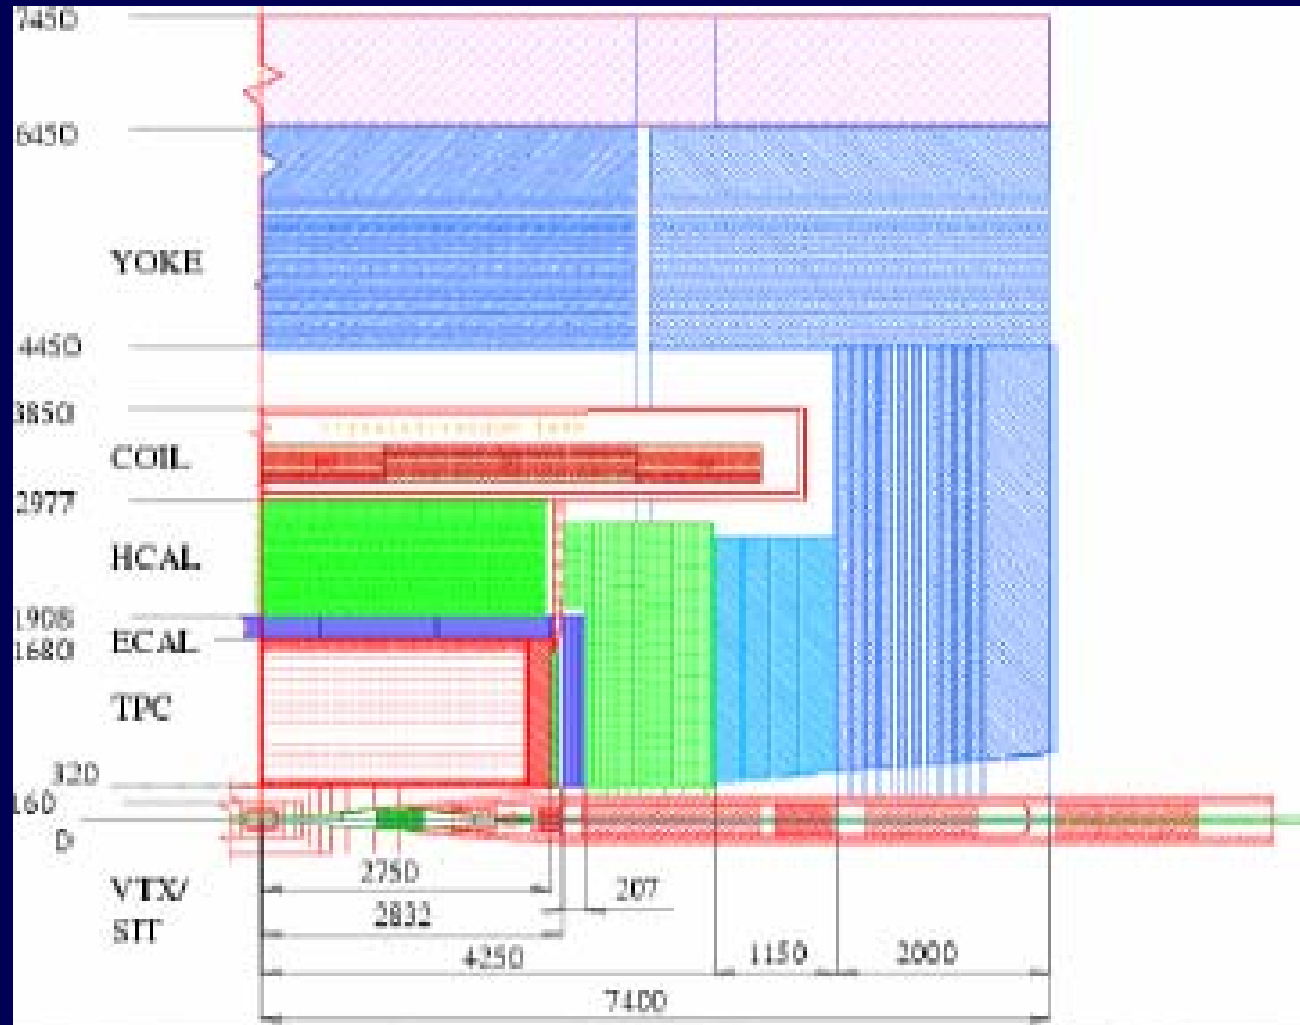

ILC Detector Concepts

Low material budget, Robustness, Easy to build and to work with, Low cost

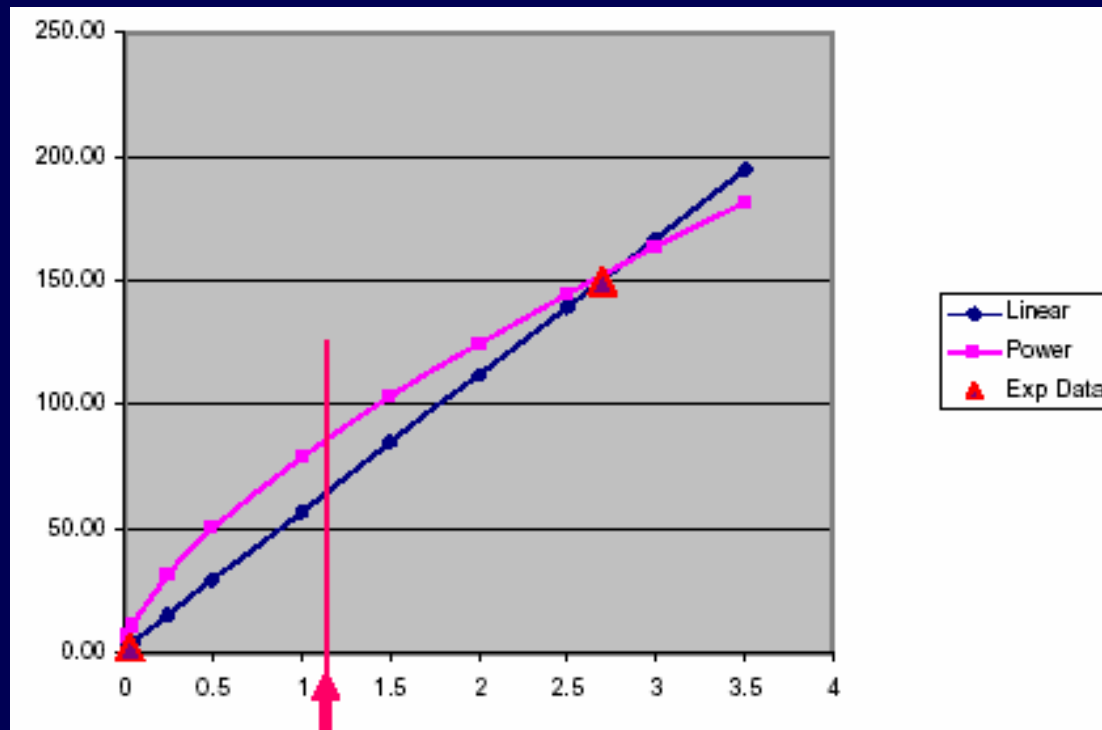

Solenoid Cost in M\$ as function of Radius

ILC Simulation Frameworks

LDC

SiD

GLD

- BRAHMS (G3)
- MOKKA (G4)
Geometry
MySQL DB

Output is in LCIO

- SLIC (G4)
Geometry
GDML

Output is in LCIO

- JUPITER(G4ROOT)
Geometry
ROOT or DB

Output is in LCIO

How we can make an analysis of the Detector Concepts ?

ILC Simulation Frameworks (Mokka)

MOKKA Detector scaling on a few key parameters

Thanks to a new CGA geometry building schema is able to automatically scale the detector devices depending on some key parameters. This new schema is called "super drivers" in Mokka.

In this release six new super drivers are available (see Mokka).

The available key parameters are registered in the table parameters of the models03 database, with a description and a default value.

The default values for the key parameters are overwritten by the default values found in the model_parameters, if a model-parameter association is found in this table.

The default values for the key parameters can still be overwritten by:

- using a pre-existing setup in the database which sets a set of parameters-values pairs and/or
- the new /Mokka/init/globalModelProperty command.

The new /Mokka/init/globalModelProperty command:

no matter the values storage in the database, the user can change the detector geometry just inserting a set of /Mokka/init/globalModelProperty commands in the steering file.

Thanks [Paulo Mora de Freitas](#)

ILC Simulation Frameworks (Mokka)

MOKKA Detector scaling on a few key parameters

Super drivers can share key parameters. Moreover, a super driver can change on the fly shared parameters by other super drivers in such way to propagate the changes in the geometry and to avoid detector overlaps.

For this reason the detector build order becomes very important, so the "build_order" new attribute for the ingredients table (see below).

Shared parameters are registered in the "sharing" table. Selectin the n-tuples for a given parameter name gives you the list of super drivers sharing the given parameter name.

The order which Mokka initialize a key parameter before launching the a super driver construction is the following:

- 1) default values found in the parameters table;
- 2) the value found in the model_parameters table, if a model-parameter association is found in this table;
- 3) the value found in the setup_parameters table, if a setup-parameter association is found in this table;
- 4) the value set by a /Mokka/init/globalModelProperty command if the parameter name matches.
- 5) the value set by a previous super driver construction, if both super drivers share the parameter and if the previous super driver changed the parameter value.

ILC Simulation Frameworks Geometry

Still Problem with Unification of the Geometry Descriptions

Mokka up to now has more Detailed Geometry Description

Work is going on for the translation of the XML to MySQL

ILC Simulation Frameworks Geometry (MySQL)

LDC Mokka

```
# MySQL dump 8.13
#
# Host: flc23 Database: ecal02
#-----
# Server version 3.23.37-log
#
# Current Database: ecal02
#
CREATE DATABASE /*!32312 IF NOT EXISTS*/ ecal02;
USE ecal02;
#
# Table structure for table 'barrel'
#
CREATE TABLE barrel (
  barrel_phi_offset float(10,4) default NULL,
  inner_radius float(10,4) default NULL,
  staves_gap float(10,4) default NULL,
  modules_gap float(10,4) default NULL
) TYPE=ISAM PACK_KEYS=1;
#
# Dumping data for table 'barrel'
#
INSERT INTO barrel VALUES (0.0000,1700.0000,2.0000,1.0000);
```

ILC Simulation Frameworks Geometry (XML)

SiD SLIC

```
<sensitive_detectors>
```

```
<calorimeter name="CalNP" (1)
```

```
  hitsCollectionName="CalHitsA"  
    ecut="0.25"  
    eunit="MeV"  
    verbose="0">
```

```
<gridXYZ gridSizeX="5.0"
```

```
  gridSizeY="5.0"  
    gridSizeZ="0.0"  
    lunit="mm"/>
```

```
</calorimeter> <calorimeter name="CalPrj" (2)
```

```
  hitsCollectionName="CalHitsB"  
    ecut="0.25"  
    eunit="MeV"  
    verbose="0">
```

```
<projectiveCylinder ntheta="1440" nphi="1440" />
```

```
</calorimeter>
```

```
<calorimeter name="CalPrjZ" (3) hitsCollectionName="CalHitsC"
```

```
  ecut="0.25"  
  eunit="MeV"  
  verbose="0">
```

```
<projectiveZPlane ntheta="360" nphi="360" /> </calorimeter>
```

ILC Simulation Frameworks (Mokka)

SiD Detector Concept Implementation

SiD01, SiD02 implements the SiD detector concept using the calorimeters and so on from LDC, with all the parameters adapted the best possible to agree with all the current SiD proposal.


For both models the field is set to 5.0 tesla.

SiD01 and SiD02 are composed both by the following drivers:

```
+-----+
| sub_detector |
+-----+ | SiDFwd00 | SiDBar00 | tubeSiD01 | vxdSiD00 | ftdSiD00 |
          | SEcal01  | SHcal01  | SCoil01   | SYoke01  | SField01  |
+-----+
```

SiDBar00 implements the Si Tracker barrel and SiDFwd00 the Si Tracker end caps. tubeSiD01, vxdSiD00 and ftdSiD00 are LDC devices adapted for the SiD dimensions. ftdSiD00 works as the Si VDX disks for these models.


ILC Simulation Frameworks

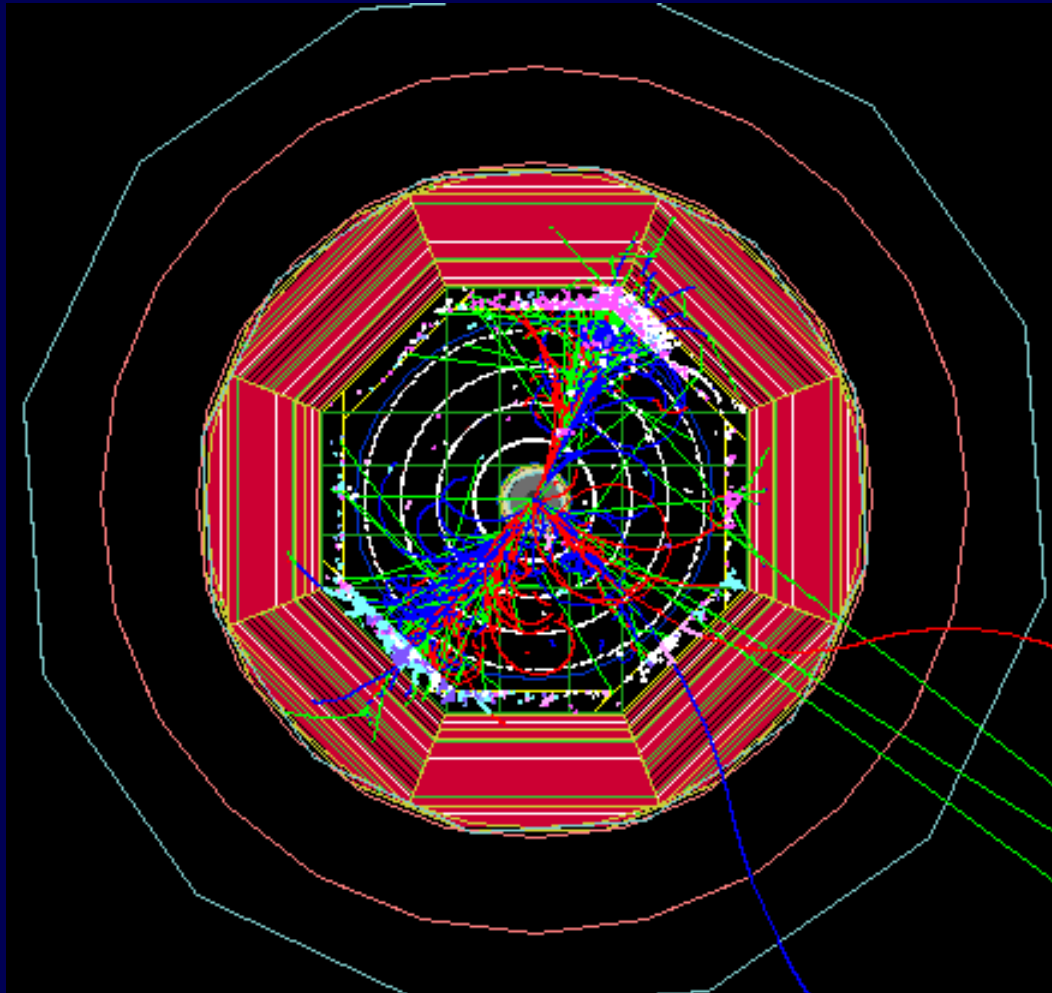

SiD in Mokka
 $hZ \rightarrow b\bar{b} + q\bar{q}$



SiD Concept in Mokka Simulation Framework

LDC Geometry with SILC in MOKKA

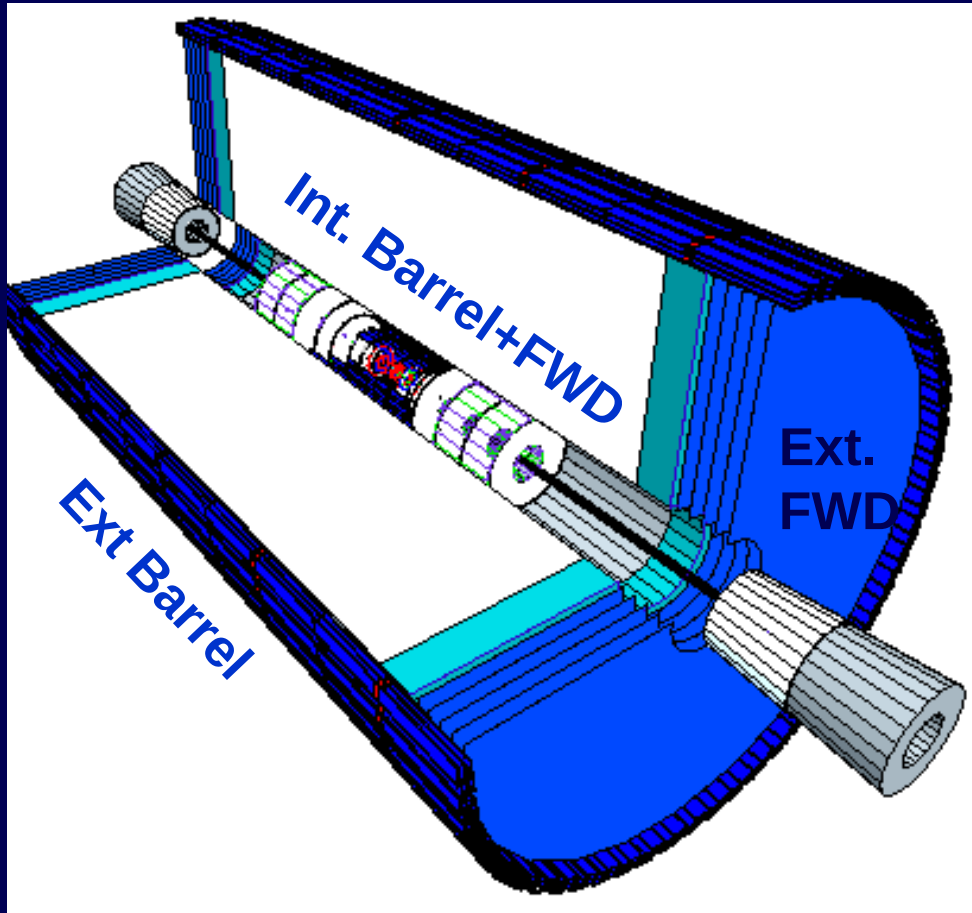

- Compact TPC
(40 cm shorter in Z , 10 cm in radius)
- Internal Barrel (Si-Strip)
- Internal Forward (Si-Strip)
- External Barrel surrounding TPC
- External Forward Tracker (Si-Strip)


LDC Geometry with SILC in MOKKA

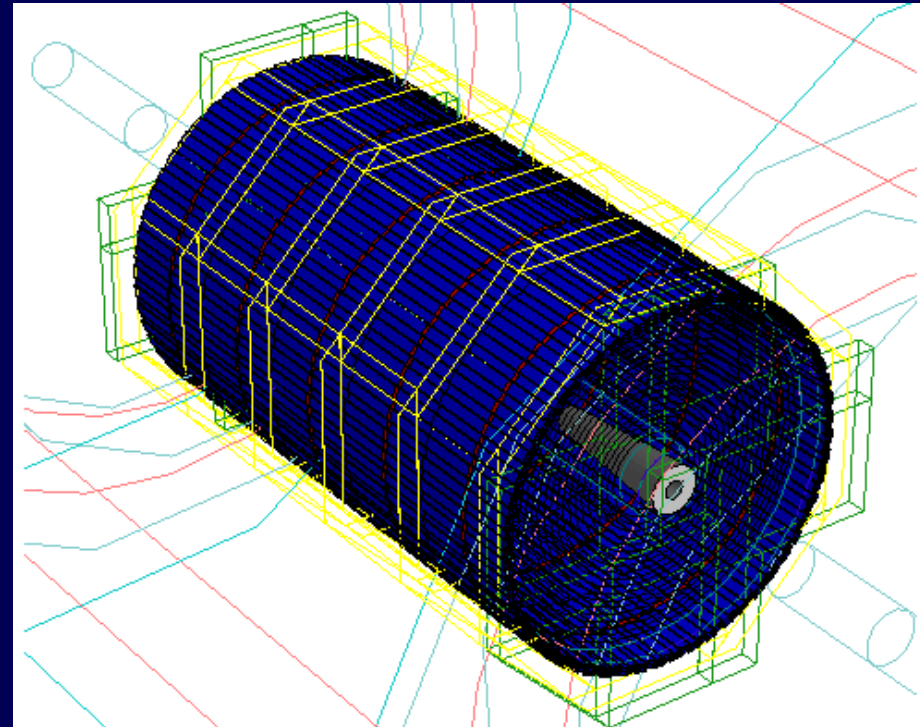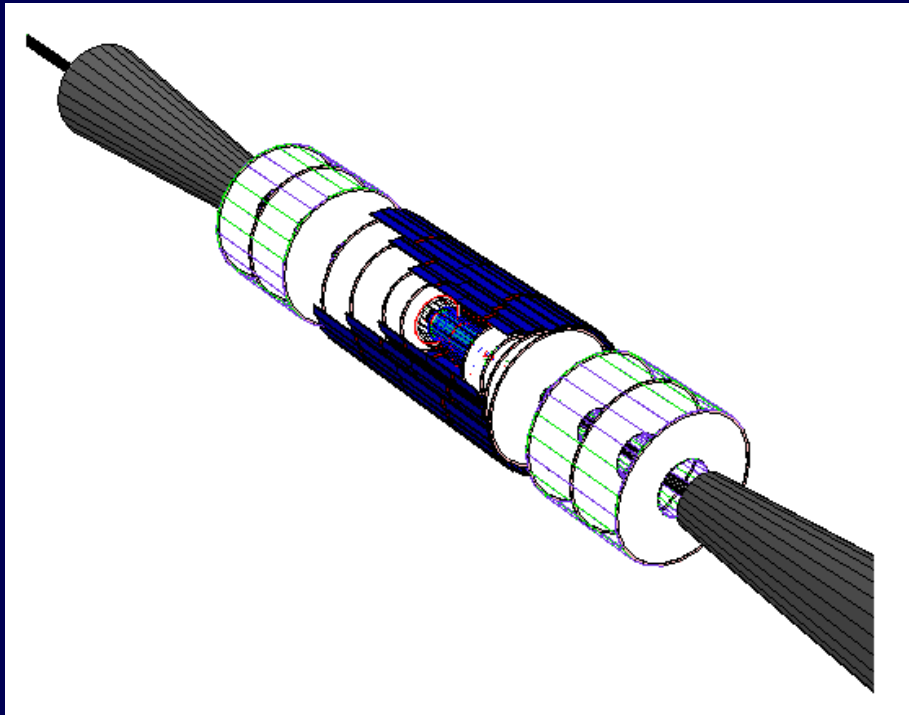

LDC Detector + SILC Geometry

ILC Simulation Frameworks

LDC Mokka
 $t\bar{t}$ $\rightarrow$ 6jets

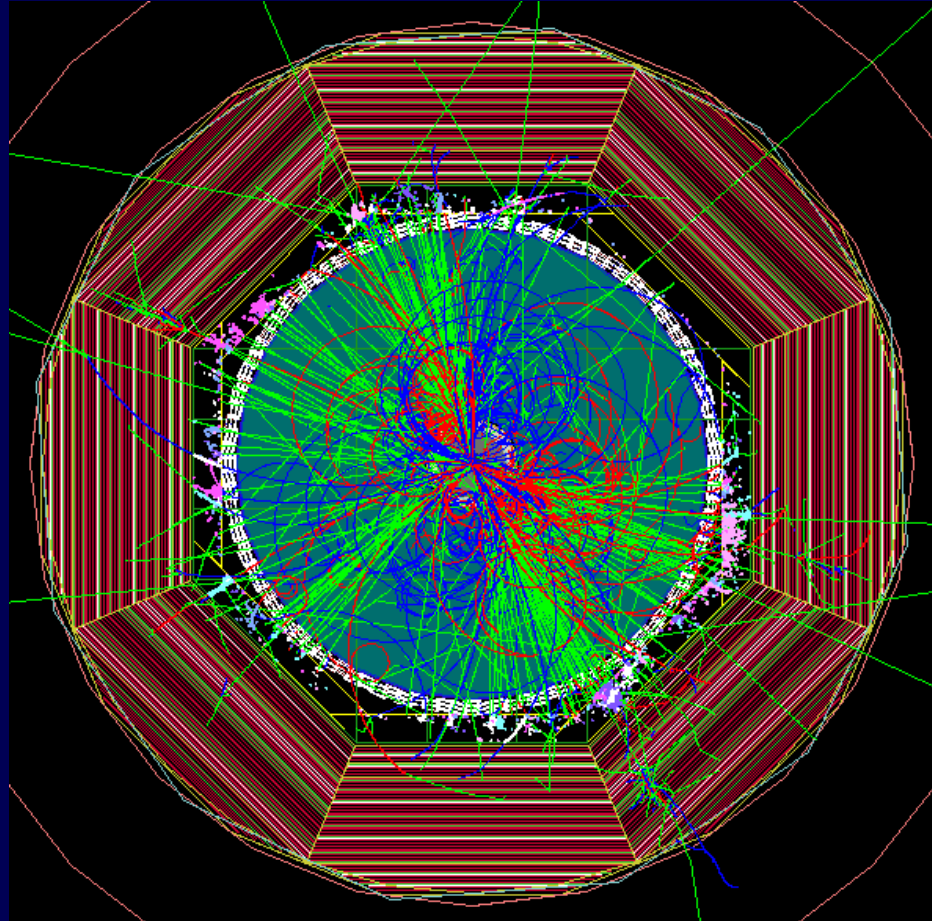

ILC Simulation and Analysis Frameworks

LDC

SID

GLD

- Connection to the Reconstruction and Analysis Frameworks
- Optimization of the different ILC detector Concepts