

Instrumentation of the Very Forward Region of a Linear Collider Detector

Wolfgang Lohmann,
DESY


Functions of the very Forward Detectors

- Measurement of the Luminosity with precision $O(<10^{-3})$ using Bhabha scattering (see talk by Halina)

- Fast Beam Diagnostics

LumiCal: $26 < \theta < 82$ mrad
BeamCal: $4 < \theta < 28$ mrad
PhotoCal: $100 < \theta < 400$ μ rad

- Detection of electrons and photons at small polar angles - important for searches (see talk by Philip & Vladimir)
- Shielding of the inner Detectors

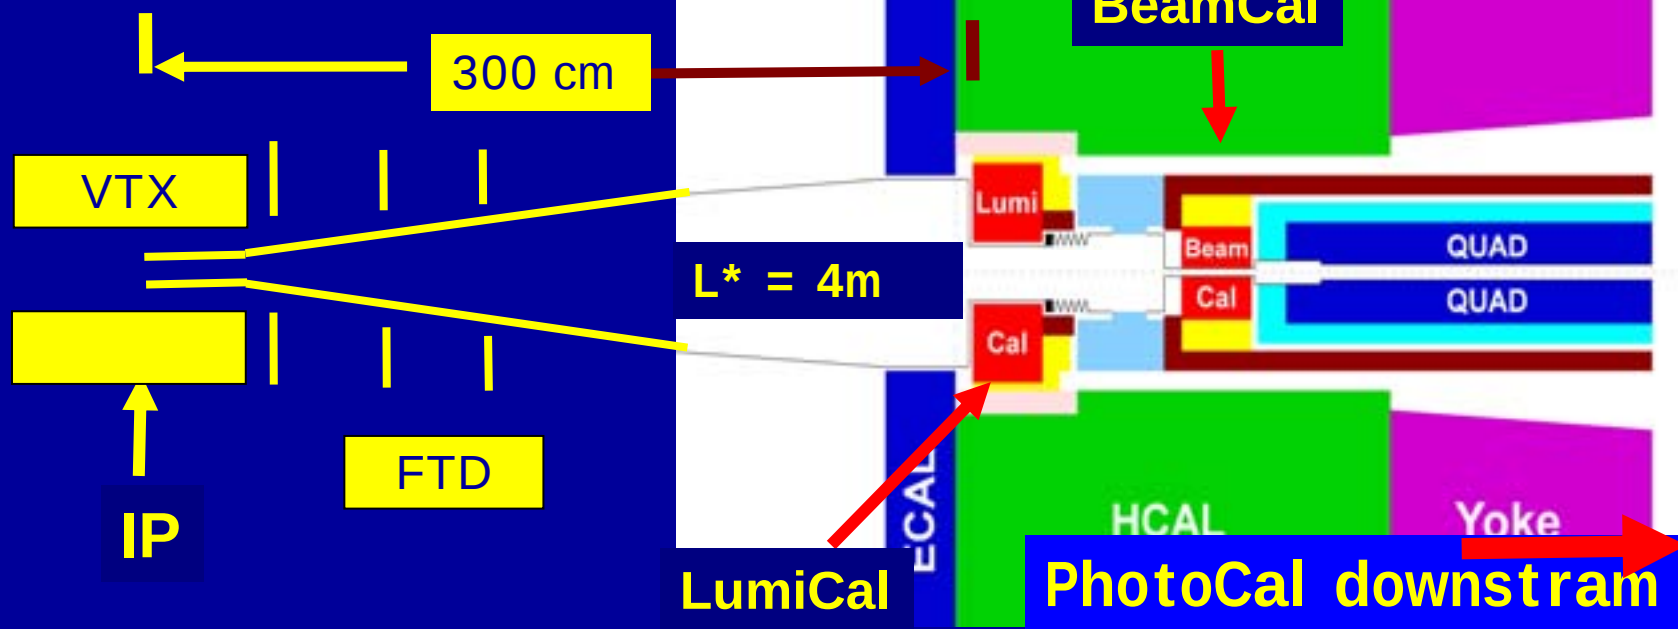

- Measurement of the Luminosity (**LumiCal**)

Gauge Process: $e^+e^- \longrightarrow e^+e^- (\gamma)$

Goal: $<10^{-3}$ Precision

Physics Case: Giga-Z ,Two Fermion Cross Sections at High Energy, $e^+e^- \longrightarrow W^+W^-$


- Technology: Si-W Sandwich Calorimeter

- MC Simulations



Optimisation of
Shape and Segmentation,
Key Requirements on the
Design

Requirements on the Mechanical Design


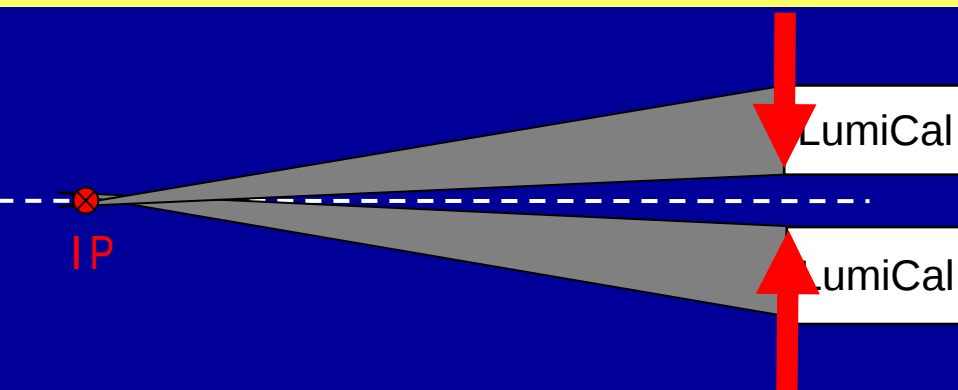


Requirements on
Alignment
and mechanical Precision
(rough Estimate)

Inner Radius of Cal.: $< 1-4 \mu\text{m}$

Distance between Cals.: $< 60 \mu\text{m}$



Radial beam position: $< 0.7 \text{ mm}$

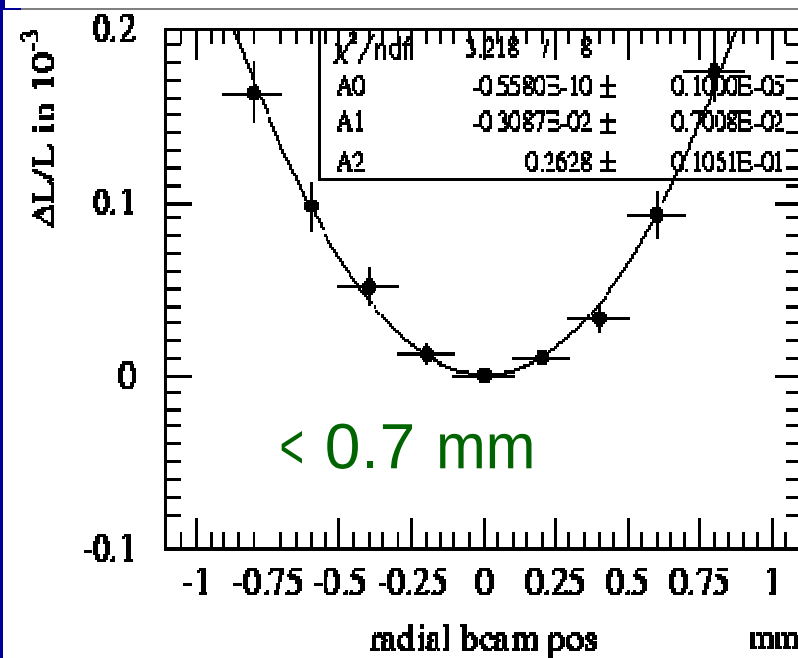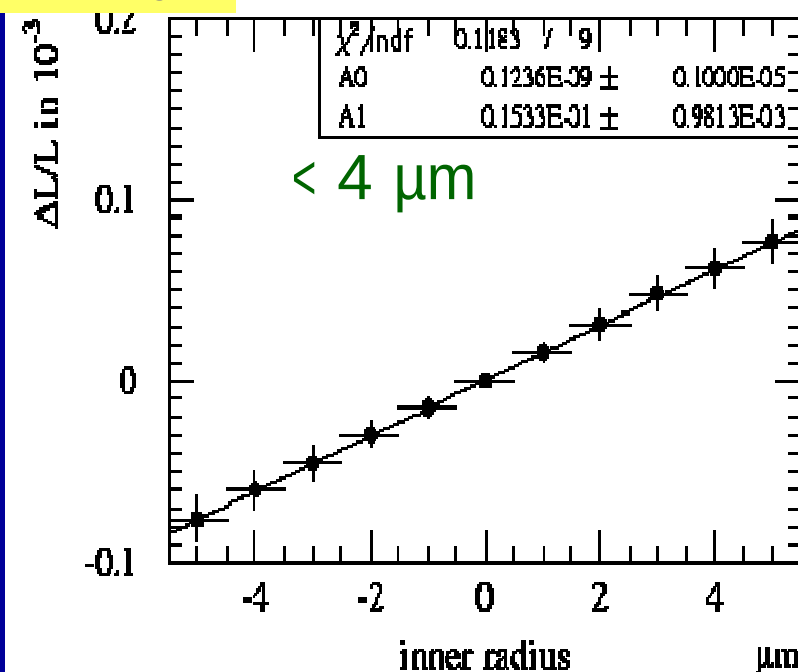

Concept for the Mechanical Frame

Decouple sensor frame
from absorber frame

Sensor carriers

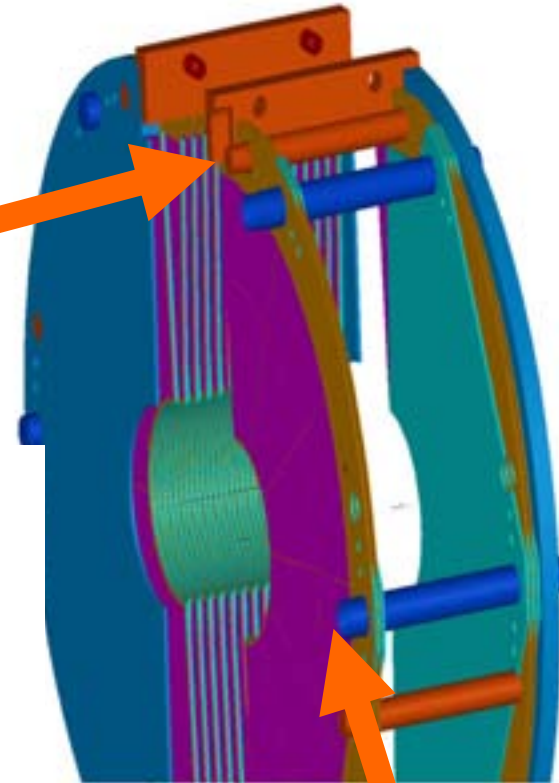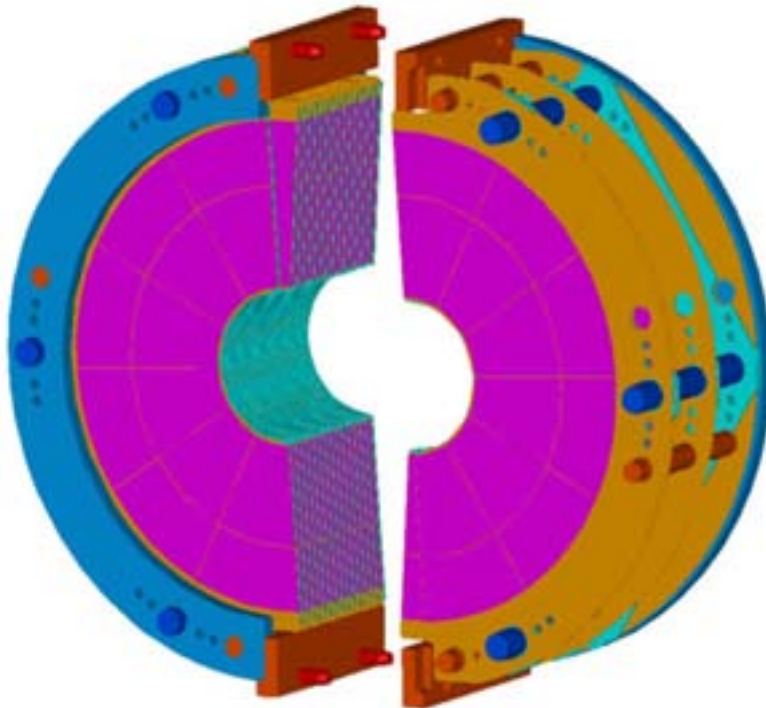

Absorber carriers






Performance Simulations for $e^+e^- \longrightarrow e^+e^-(\gamma)$

Simulation: Bhwide(Bhabha)+CIRCE(Beamstrahlung)+beamsread

Event selection: acceptance, energy balance, azimuthal and angular symmetry.

$$\langle X \rangle = \frac{\sum X_i W_i}{\sum W_i} \quad W_i = \max\{0, [\text{const}(E_{\text{beam}}) + \ln(\frac{E_i}{E_T})]\}$$


$c(\theta)(\text{rad})$

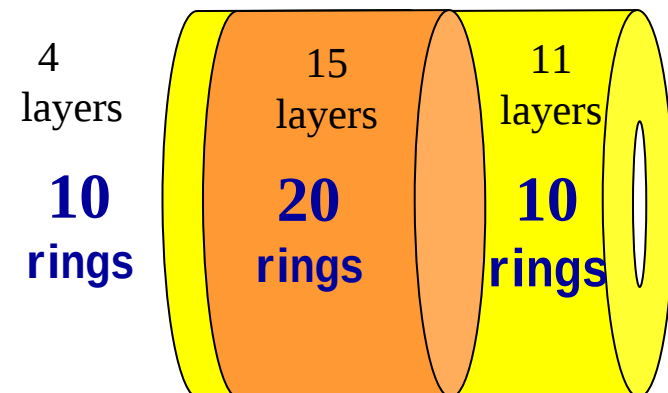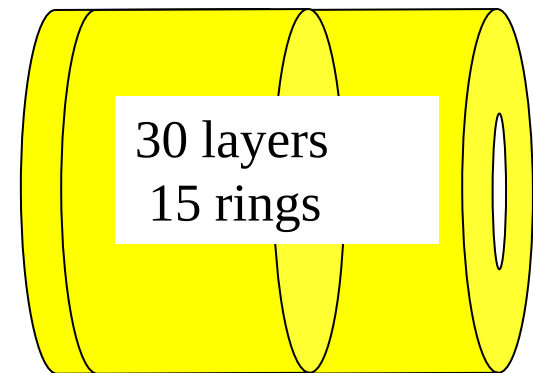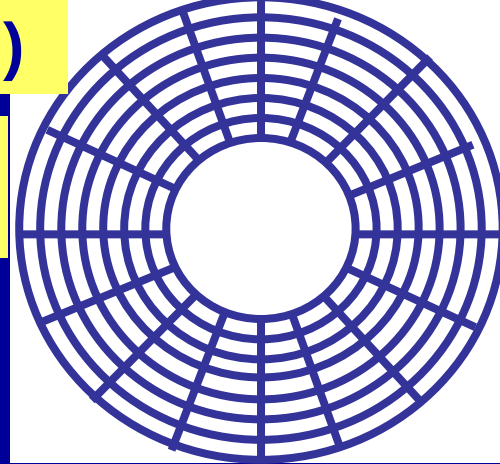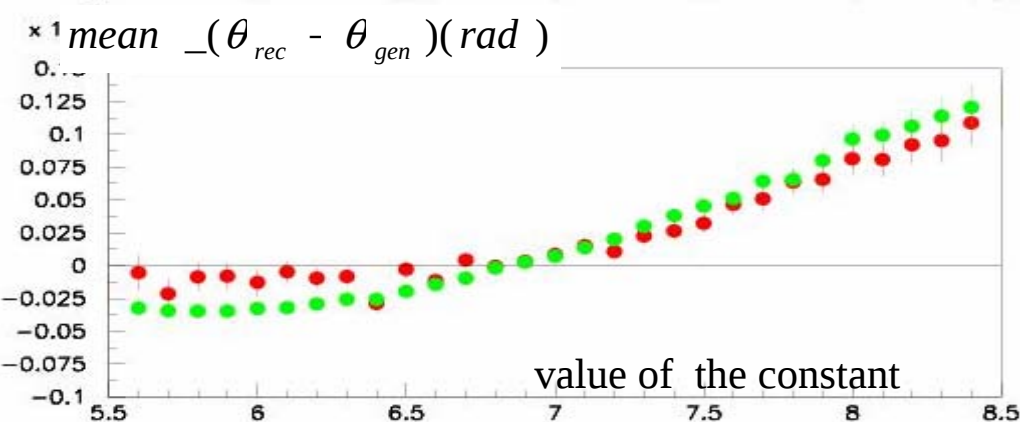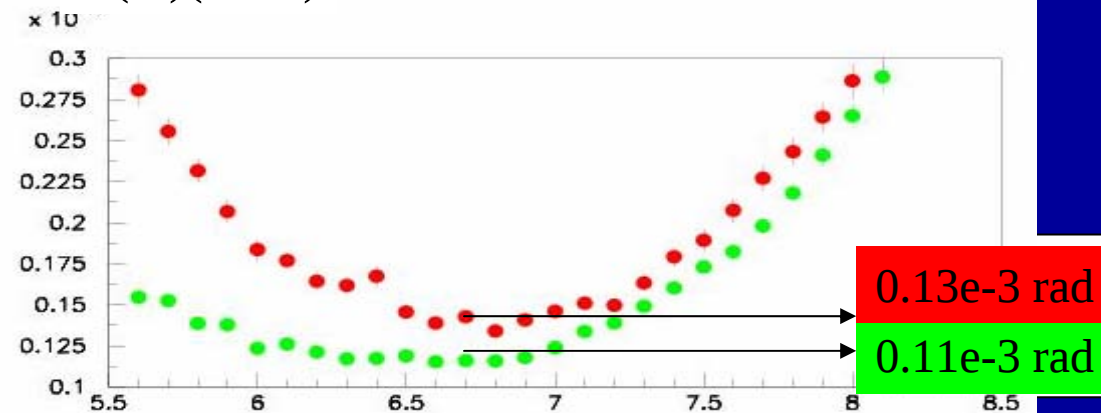


• More in the talks by Halina Abramowicz

X- angle background

Number of Bhabha events
as a function of the inner
Radius of LumiCal

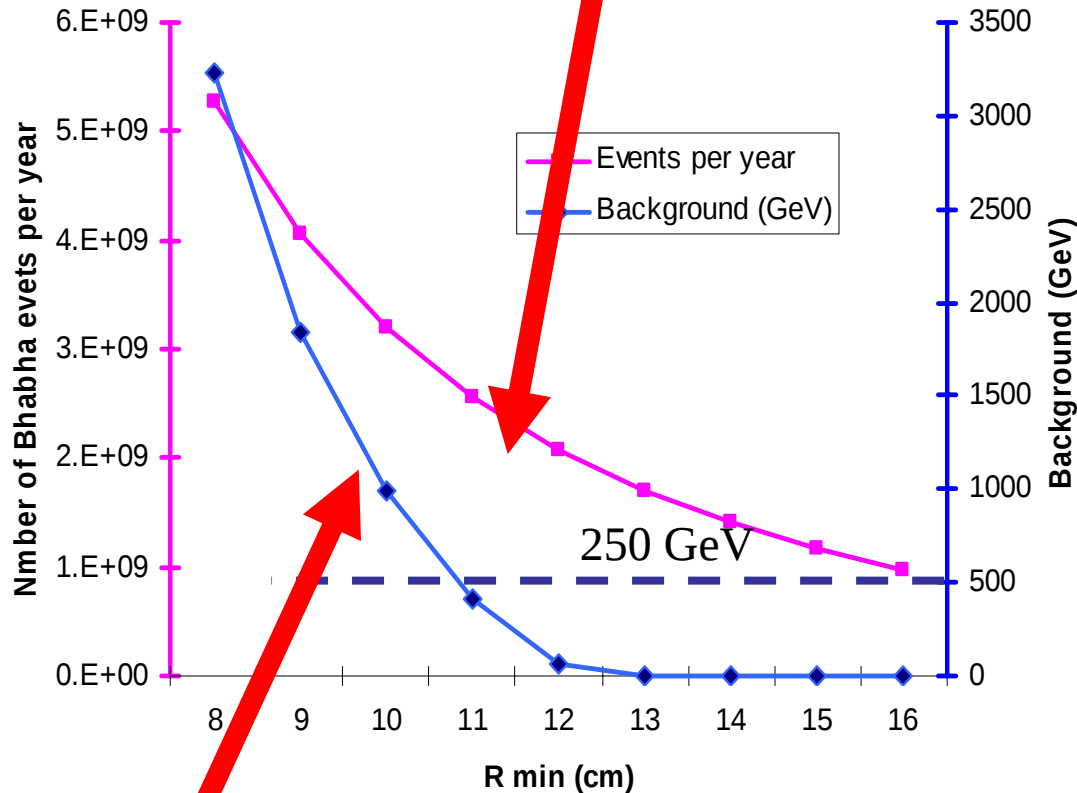

Beamstrahlung pair background
using serpentine field

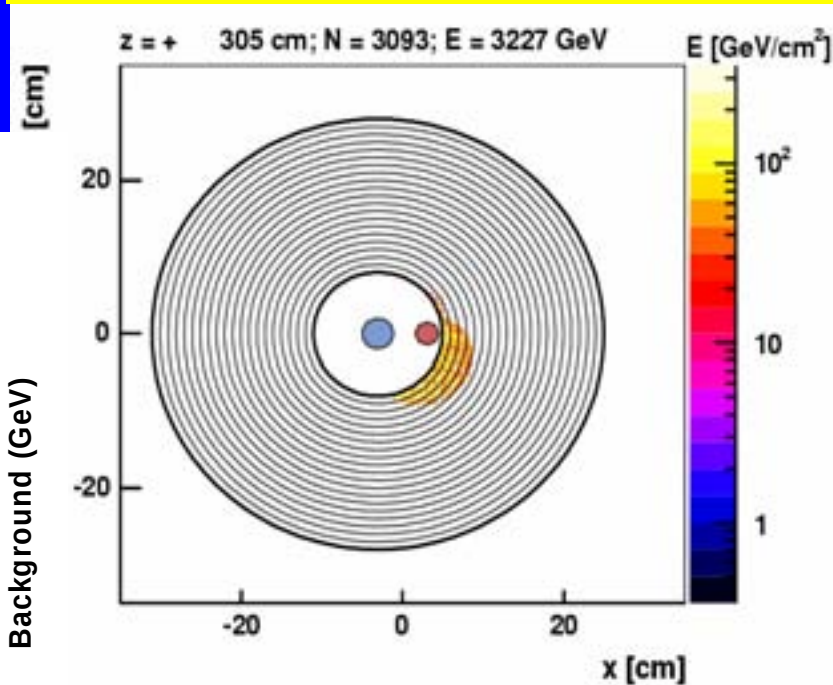


Christian Grah,
DESY-Zuethen


Background from beamstrahlung

•Fast Beam Diagnostics (BeamCal and PhotoCal)


- e^+e^- Pairs from Beamstrahlung are deflected into the BeamCal
- 15000 e^+e^- per BX $\longrightarrow$ 10 – 20 TeV (10 MGy per year)
- direct Photons for $\theta < 200 \mu\text{rad}$

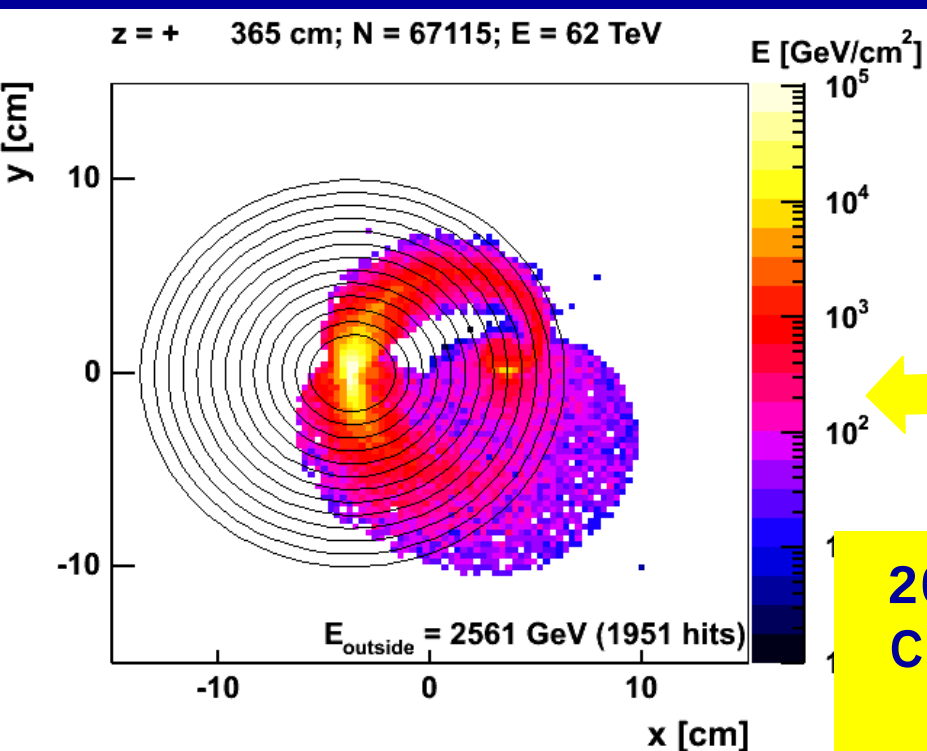


20 mrad
Crossing
angle

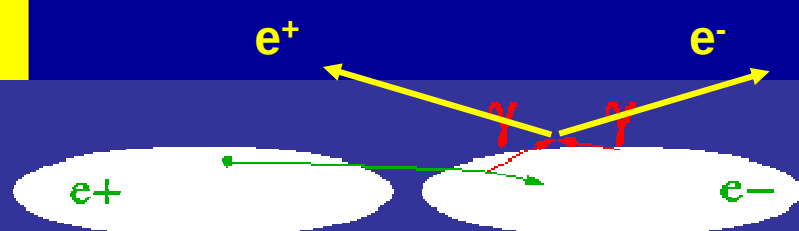

Zero crossing
angle

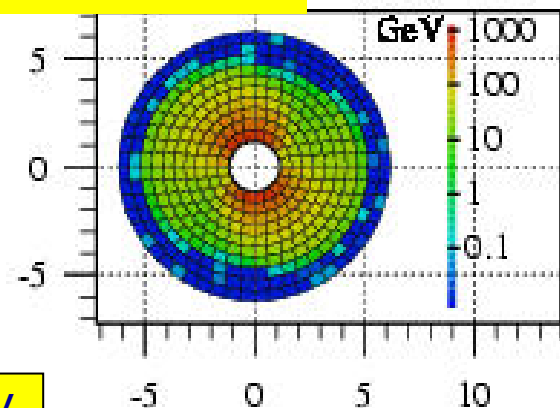


GeV

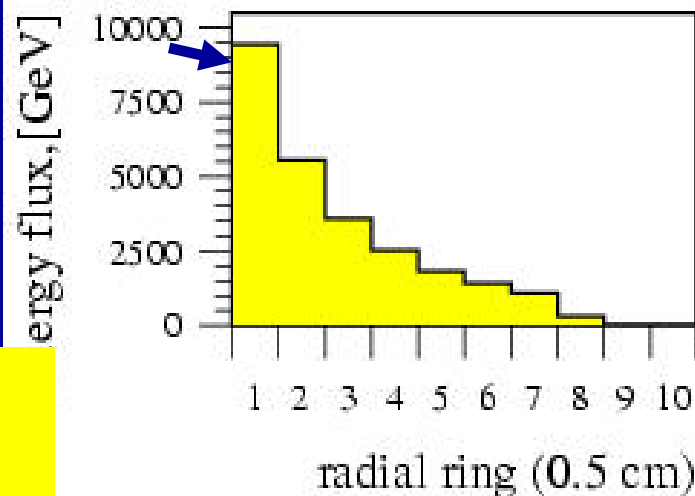

Beam Parameter Determination with BeamCal

Observables

total energy
first radial moment
thrust value
angular spread
L/R, U/D F/B
asymmetries

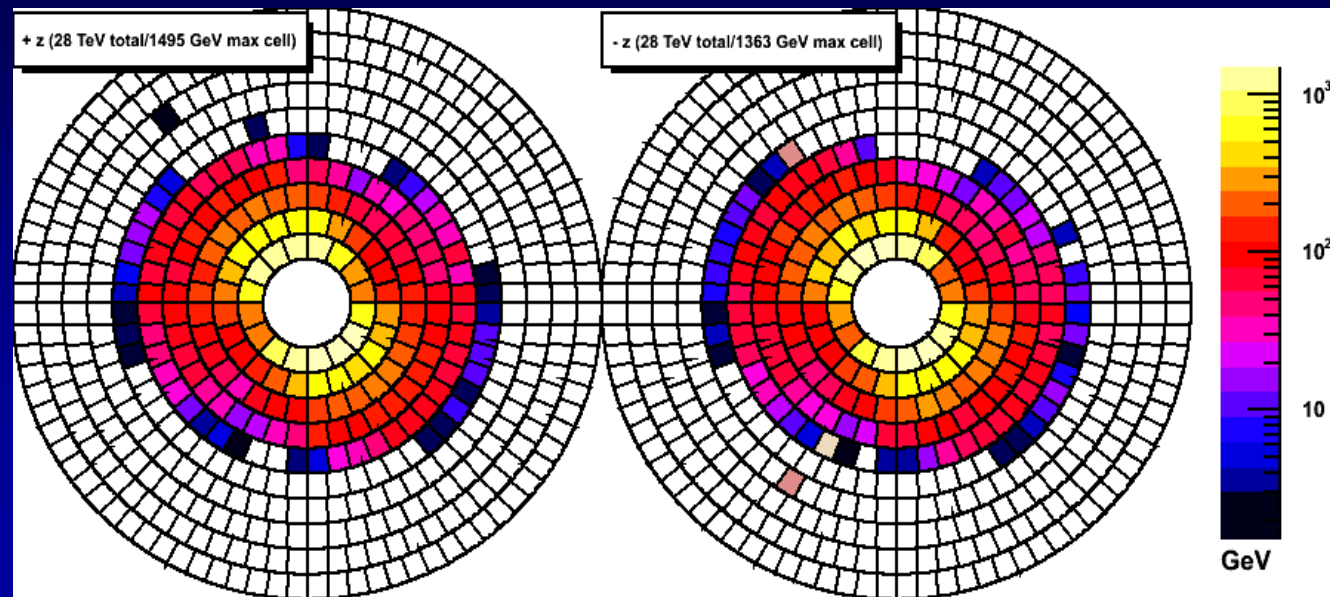

Quantity	Nominal Value	Precision
σ_x	553 nm	1.2 nm
σ_y	5.0 nm	0.1 nm
σ_z	300 μm	4.3 μm
Δy	0	0.4 nm


$$\sqrt{s} = 500 \text{ GeV}$$

Head-on or 2 mrad

Beam Parameter Determination with BeamCal

Observables

total energy
first radial moment
thrust value
angular spread
L/R, U/D F/B
asymmetries

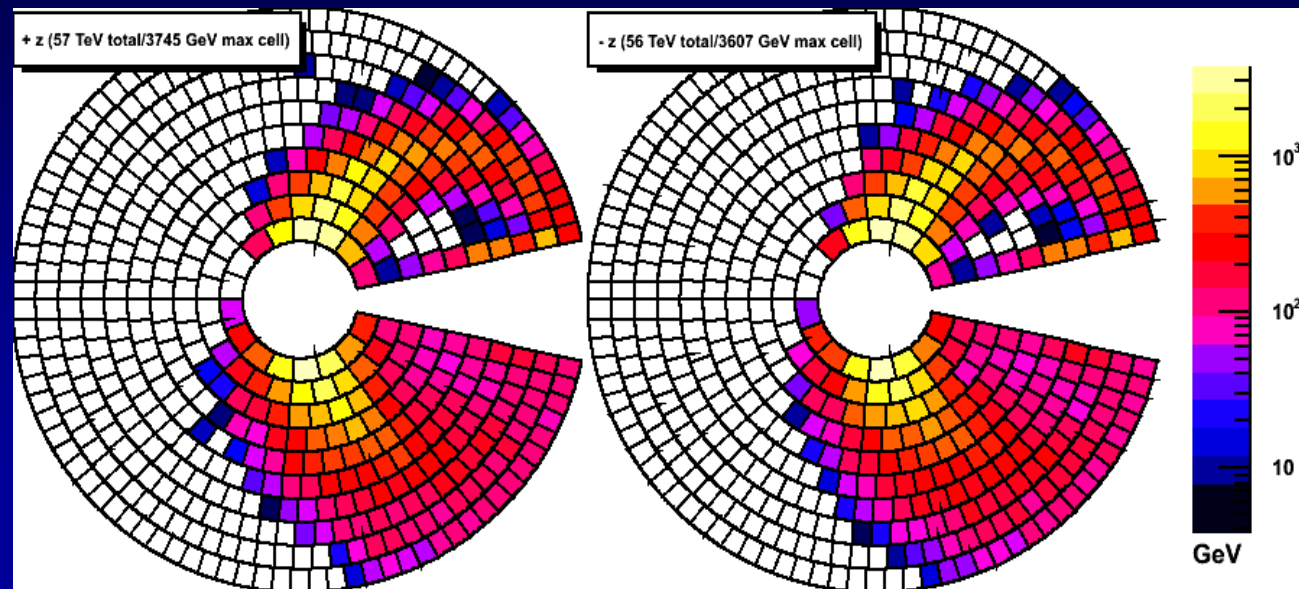


Quantity	Nominal Value	Precision
σ_x	553 nm	4.8nm
σ_y	5.0 nm	0.1 nm
σ_z	300 μm	11.5 μm
Δy	0	2.0nm

**20 mrad crossing
angle**

Also simultaneous
determination of several
beam parameter is
feasible, but: Correlations!
Analysis in preparation

PRELIMINARY!



Photons from Beamstrahlung

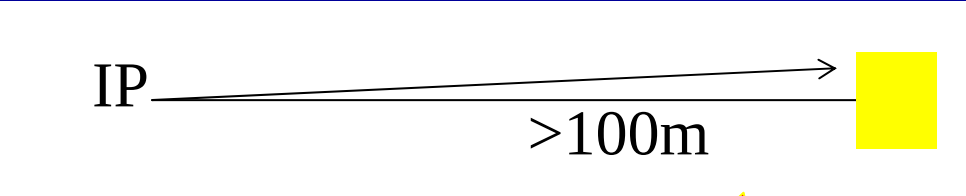

Heavy gas ionisation
Calorimeter

L/R, U/D F/B asymmetries
of energy in the angular
tails



Quantity	Nominal Value	Precision
σ_x	553 nm	4.2 nm
σ_z	300 μm	7.5 μm
Δy	0	0.2 nm

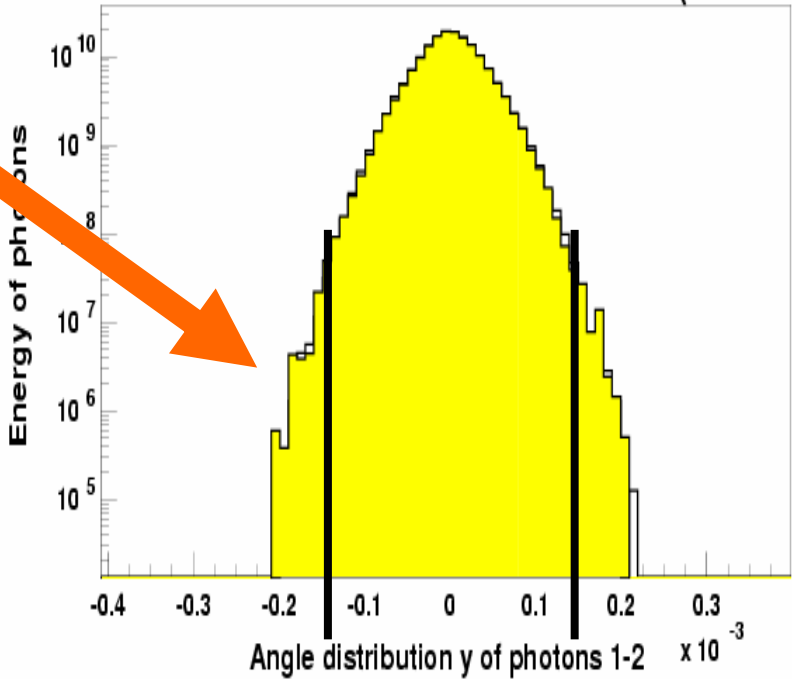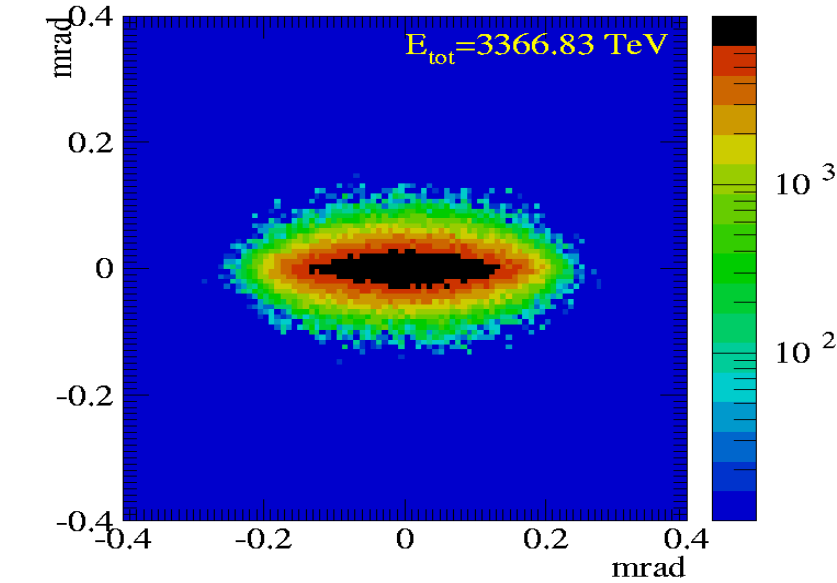

Technologies for the BeamCal:

- Radiation Hard
- Fast
- Compact


Heavy crystals

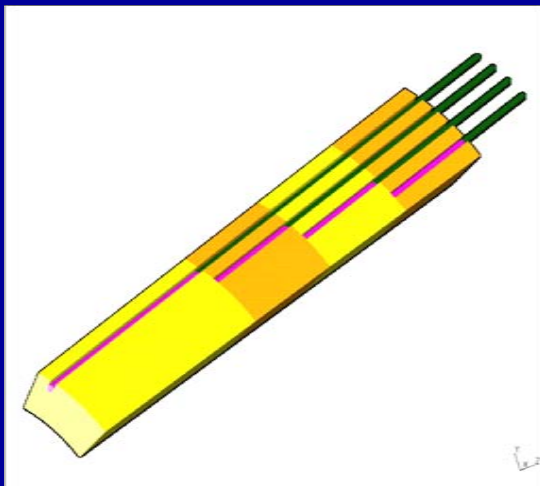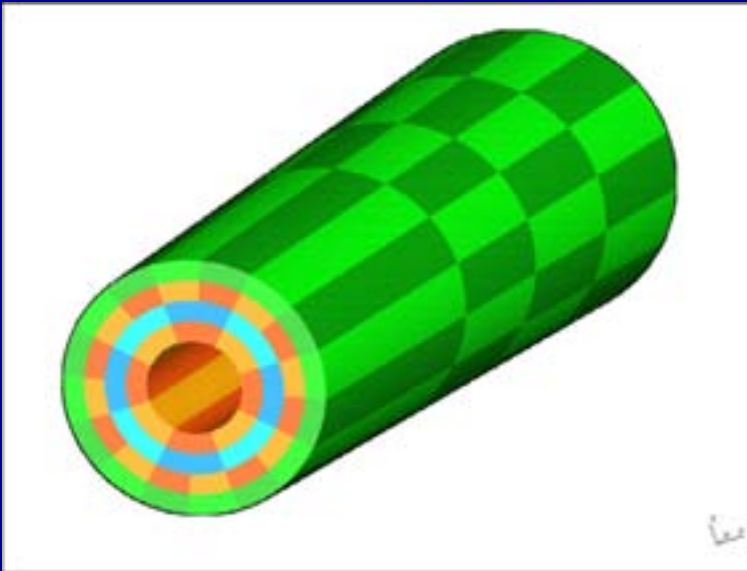

W-Diamond sandwich

Space for
electronics

sensor

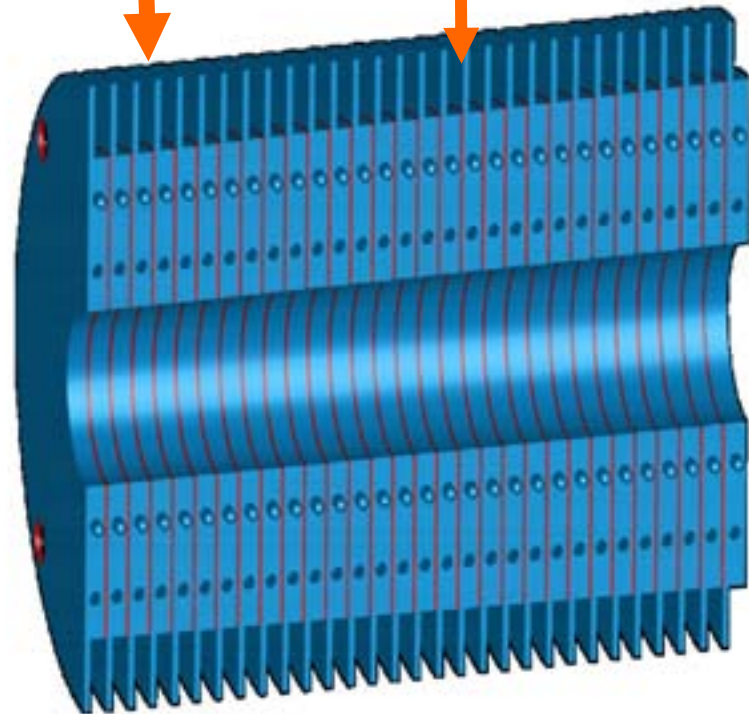



• Detection of High Energy Electrons and Photons

$\sqrt{s} = 500$ GeV

Single Electrons of 50, 100 and 250 GeV, detection efficiency as a function of R ('high background region') (talk by V. Drugakov and P. Bambade)

Detection efficiency as a function of the pad-size (Talk by A. Elagin)

Message:
Electrons can be detected!

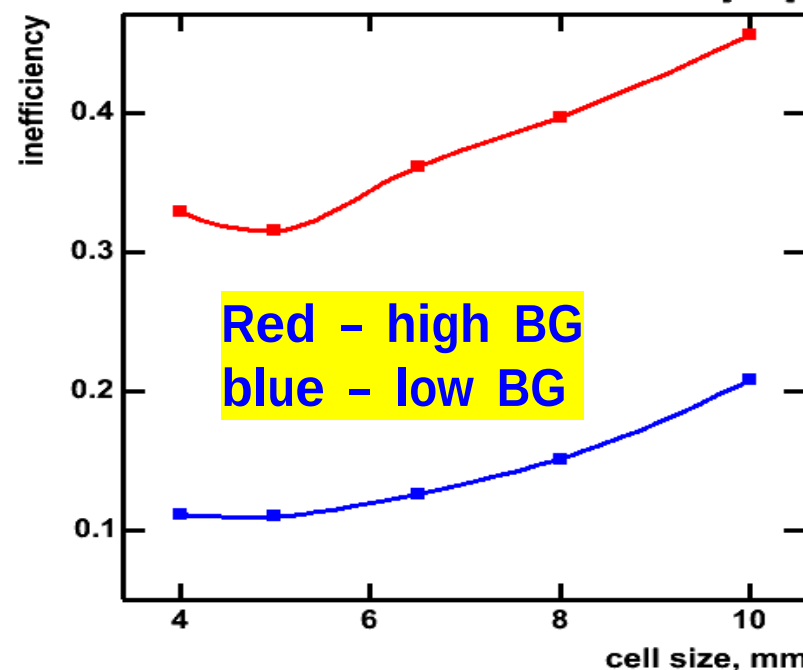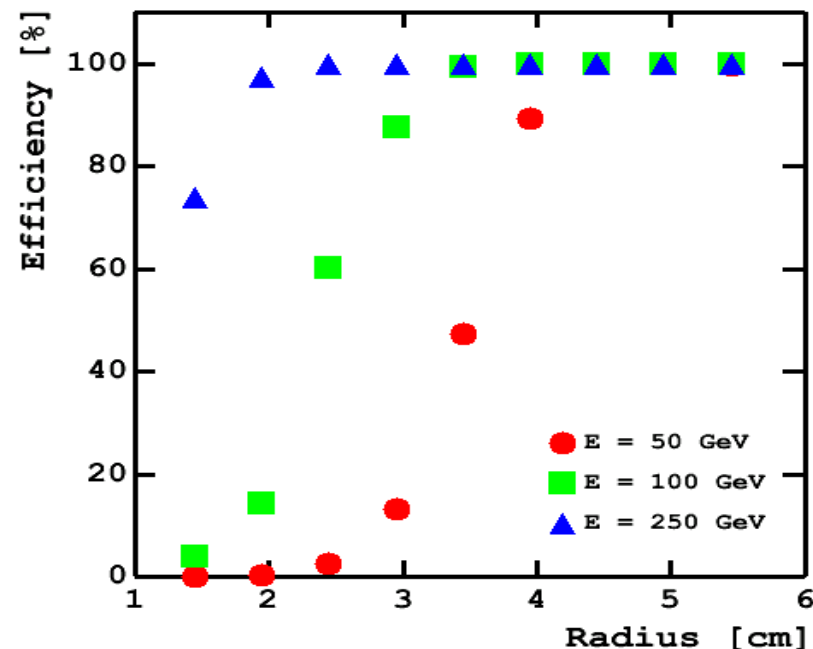


• Detection of High Energy Electrons and Photons

Realistic beam simulation

$\sqrt{s} = 500 \text{ GeV}$


Efficiency to identify energetic electrons and photons
($E > 200 \text{ GeV}$)

mean energy in particular cell (high BG near BP)

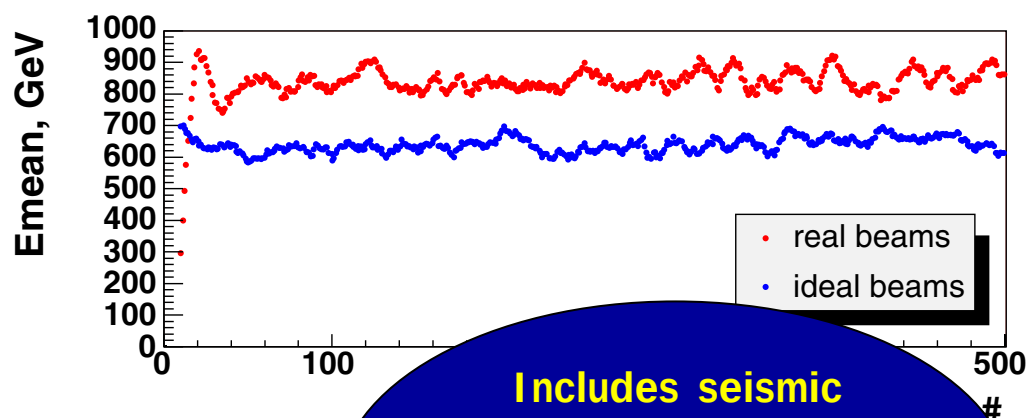


Includes seismic motions, Delay of Beam Feedback System, Lumi Optimisation etc.
(G. White)


energy RMS in p

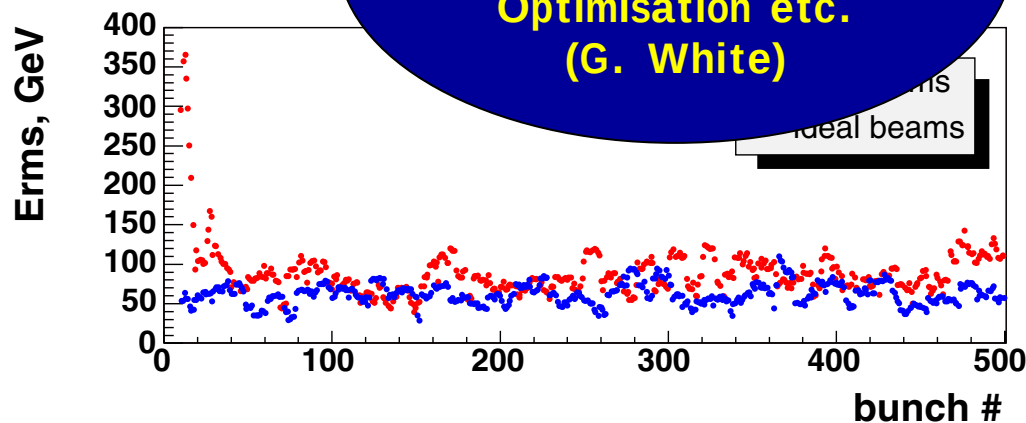

Efficiency

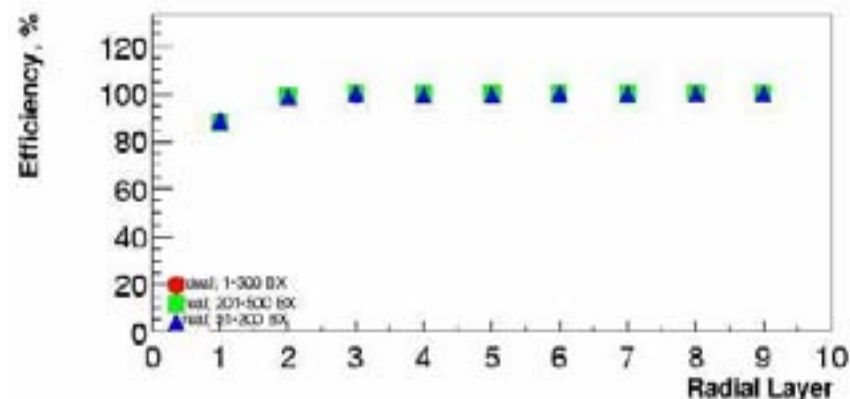


Fake Rate

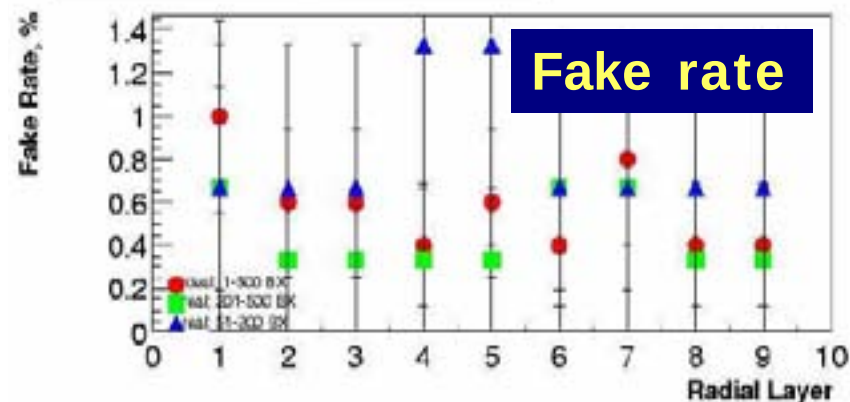


Fake rate

Sensor prototyping, Crystals


Light Yield from direct coupling

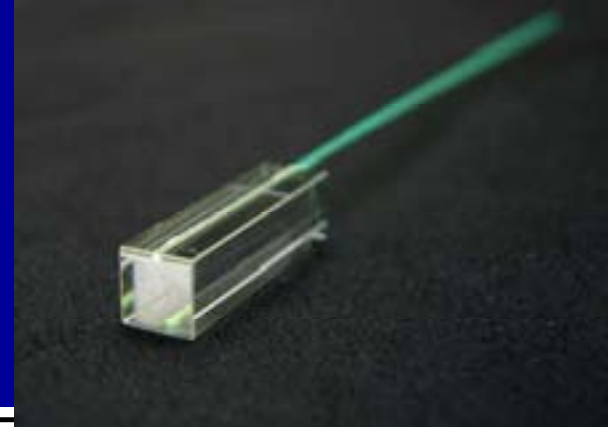




Compared with GEANT4
Simulation, good agreement

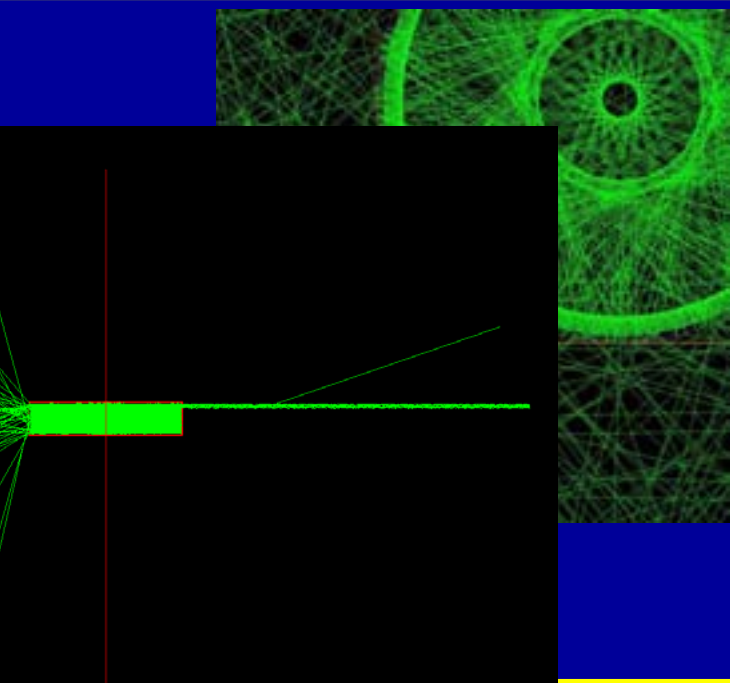

Similar results for lead glass
Crystals (Cerenkov light !)

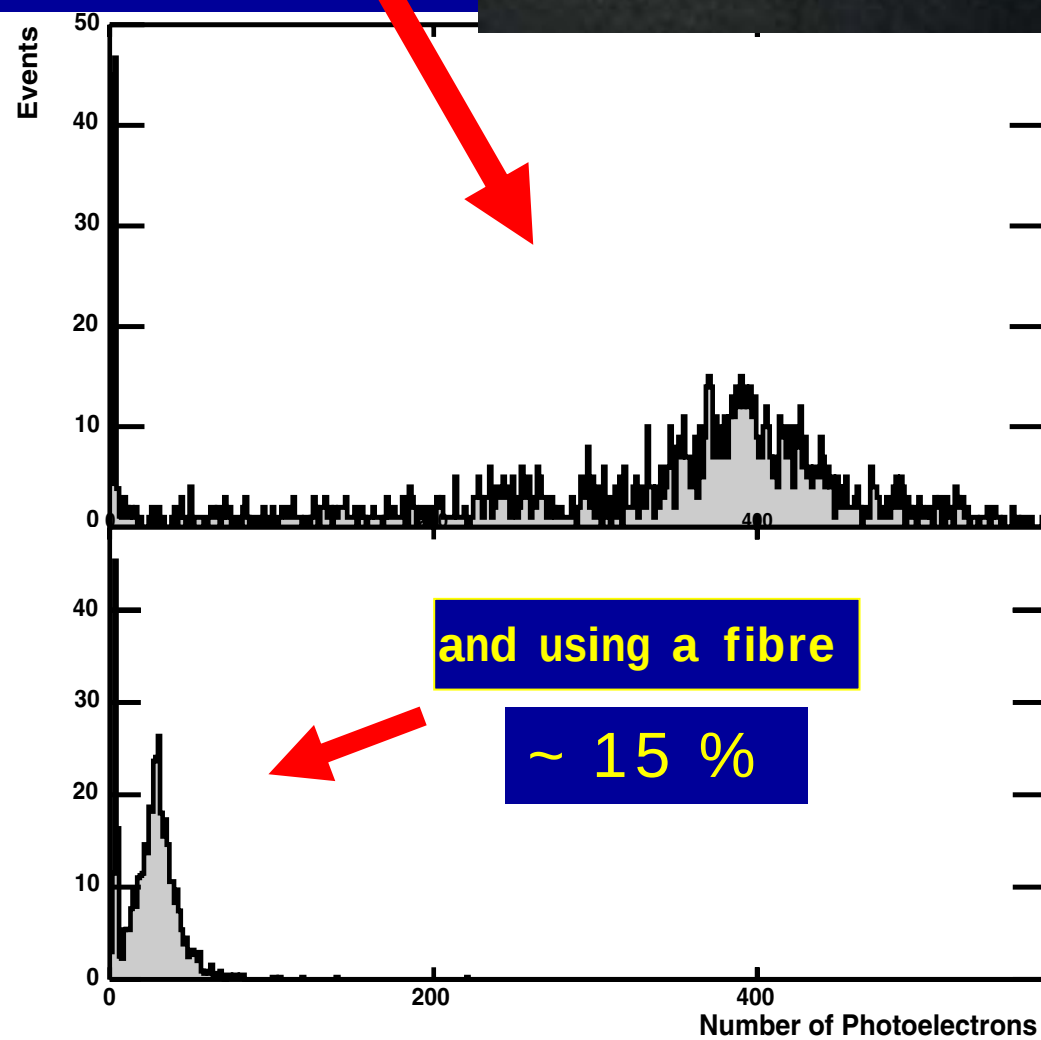

Sensor prototyping, Diamonds

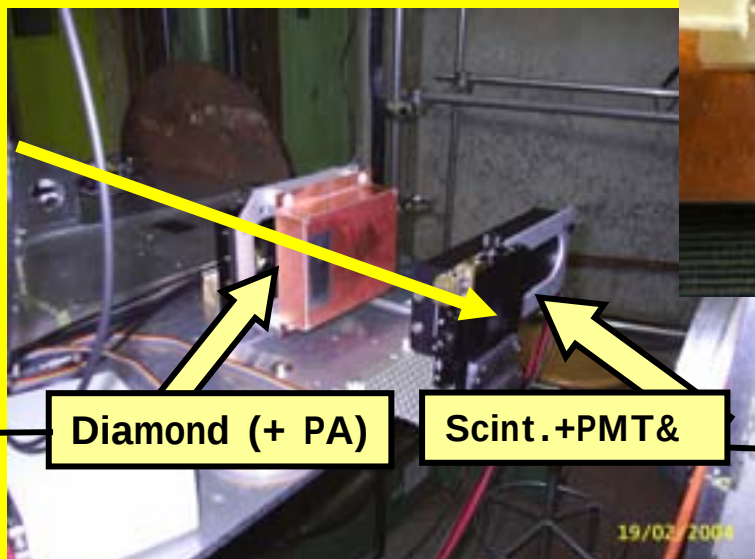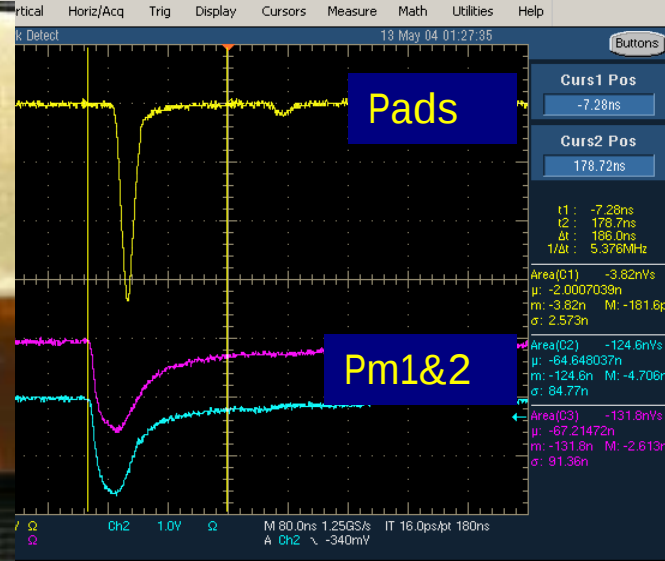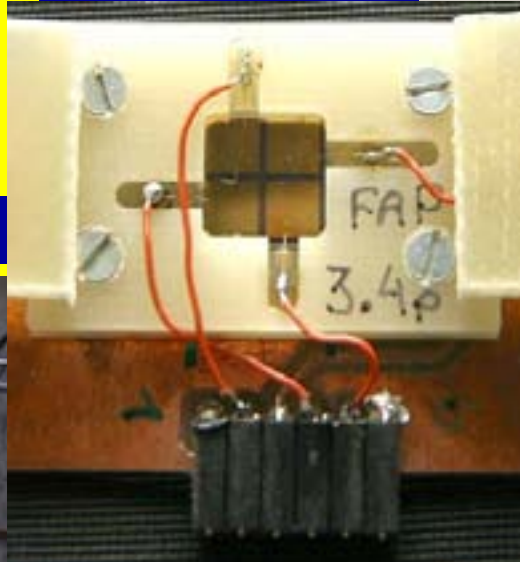


Diamond (+ PA)

Scint.+PMT&

signal

gate

ADC

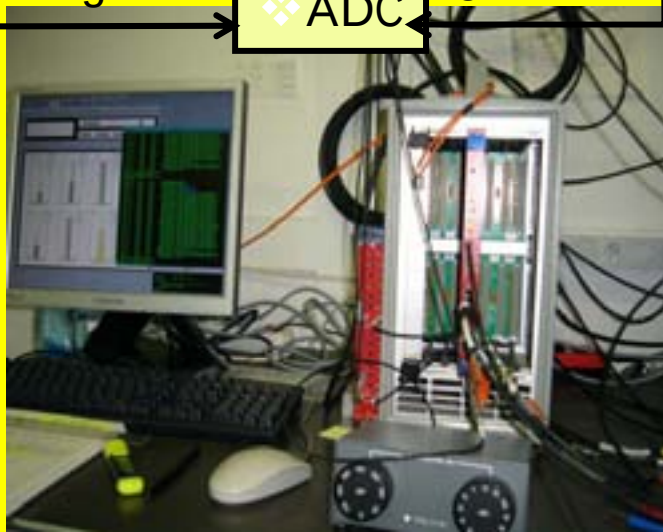

May, August/2004 test beams

CERN PS Hadron beam – 3,5 GeV

2 operation modes:

Slow extraction $\sim 10^5$ - 10^6 / s



fast extraction $\sim 10^5$ - 10^7 / ~ 10 ns
(Wide range intensities)

Diamond samples (CVD):


- Freiburg
- GPI (Moscow)
- Element6


Diamond Sensor Performance

Response to mip

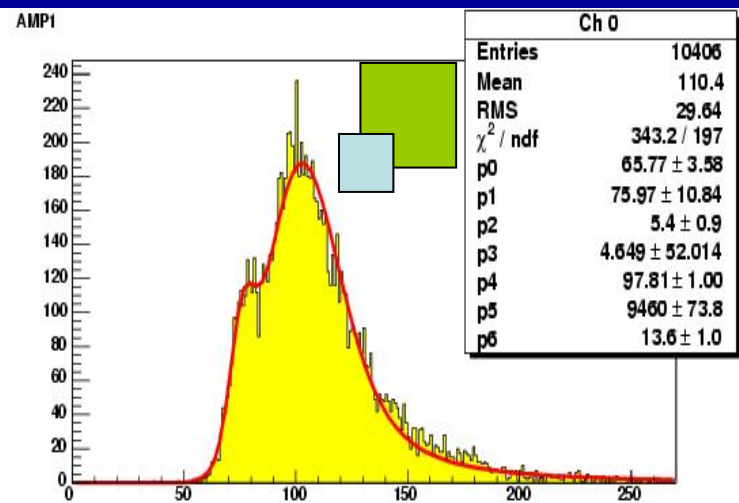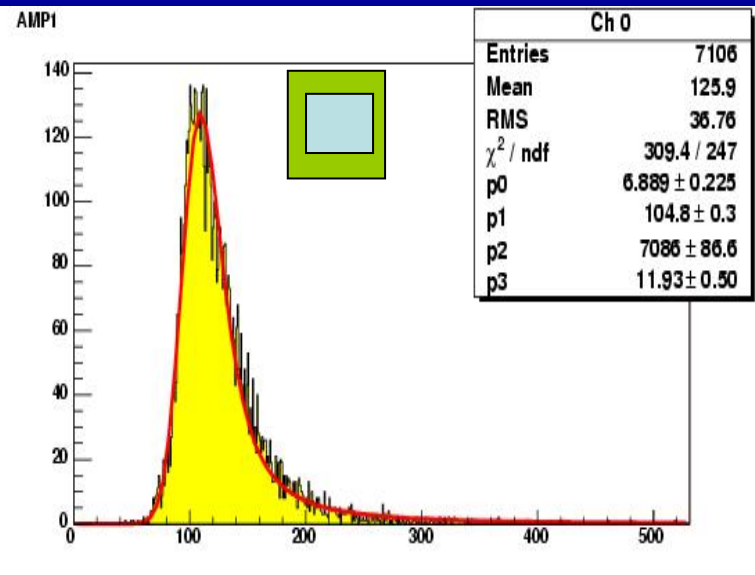

Linearity Studies with High Intensities (PS fast beam extraction) 10^5 particles/10 ns

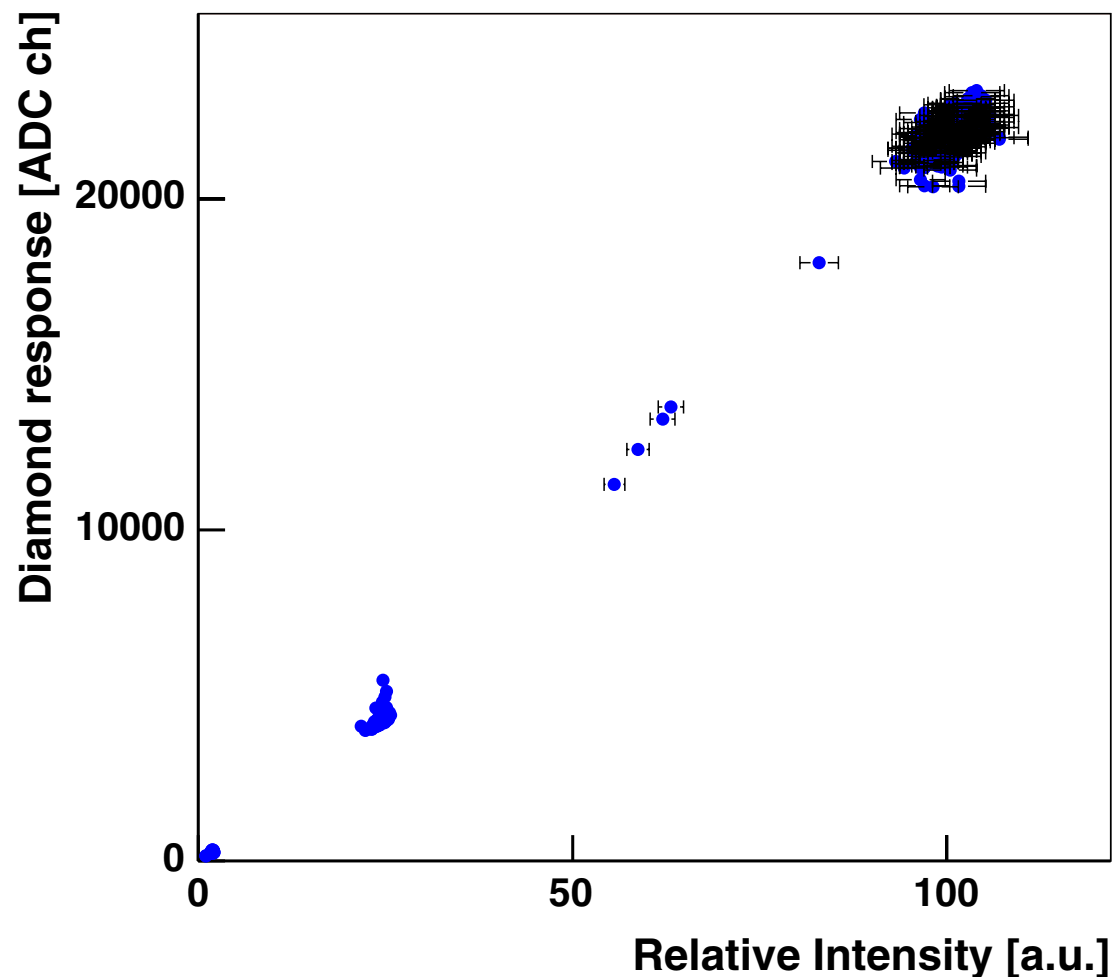

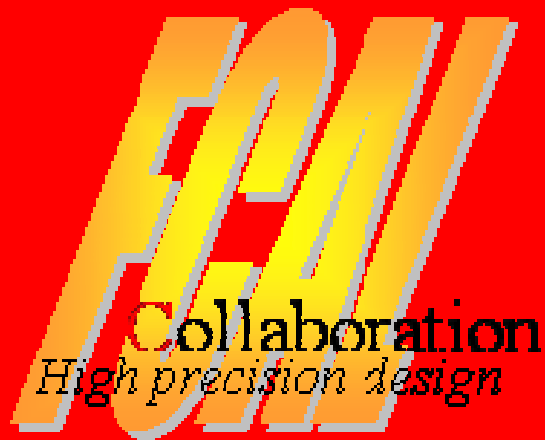

Univ. of Colorado, Boulder,
AGH Univ., INP & Jagiell.
Univ. Cracow,
JINR, Dubna,
NCPHEP, Minsk,
FZU, Prague,
IHEP, Protvino,
TAU, Tel Aviv,
DESY, Zeuthen

Workshop on the Instrumentation of the Very
Forward Region of the ILC Detector
Tel Aviv, Sept. 15.-20. 2005.
<http://alzt.tau.ac.il/~fcal/>

Summary


- Many (and promising) results in simulations/design studies
- Concept for a Luminometer for small crossing angle is advanced, 20 mrad needs a different design
- Mechanics design work ongoing
- calorimeters in the very forward region deliver very valuable information about beam parameters
- High energy electron detection down to small polar angles is feasible with compact and fine segmented calorimeters; easier for small crossing angle
- Studies with sensors started- needs more effort
- Prototype tests mandatory

Remarks


- The instrumentation of the forward region is relatively independent of the detector concept,

Backup Slides

Shower LEAKAGE in old (TDR) and new LumiCal design

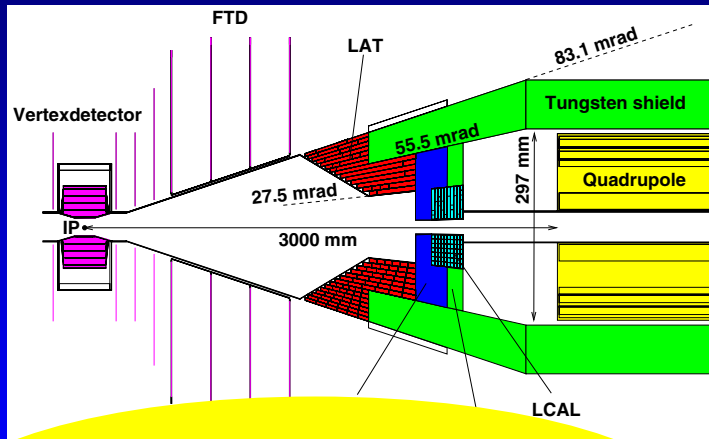


Shower in LAT
(TDR design)

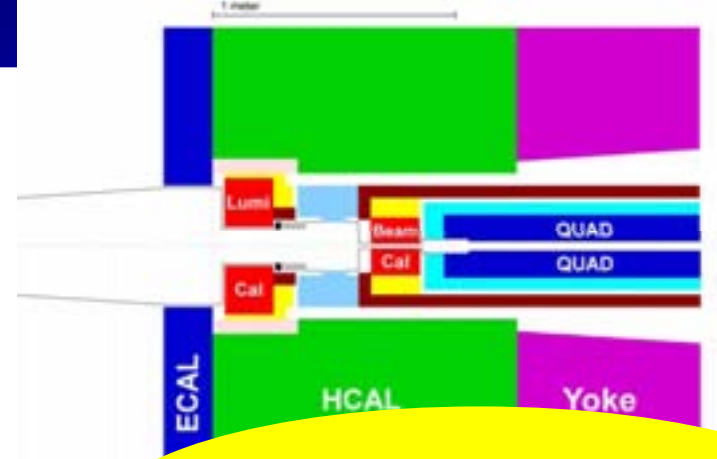


Shower in LumiCal
(new design)


LAT shower example

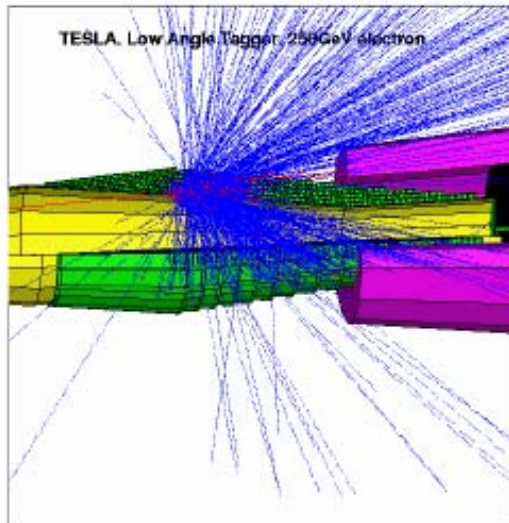


Only photons
(blue) and
electrons (red)
over 5 MeV
are displayed


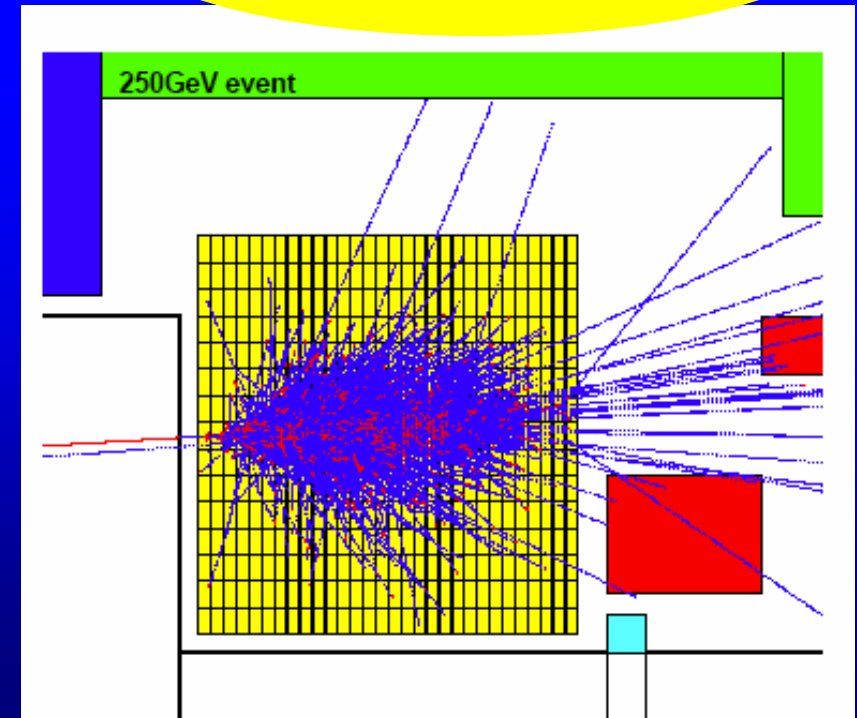



Diamond performance as function of the absorbed dose

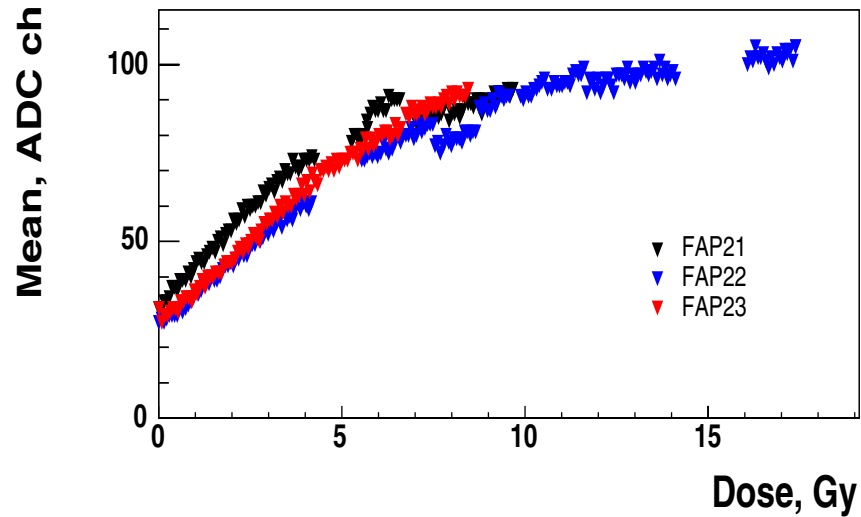

Linearity of a heavy gas calorimeter (IHEP testbeam)

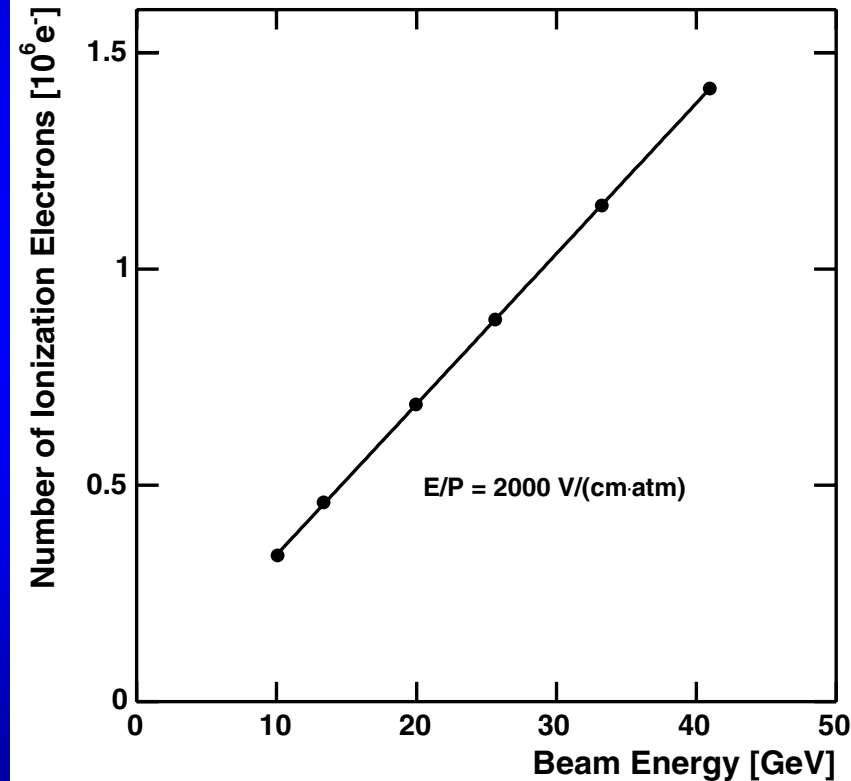


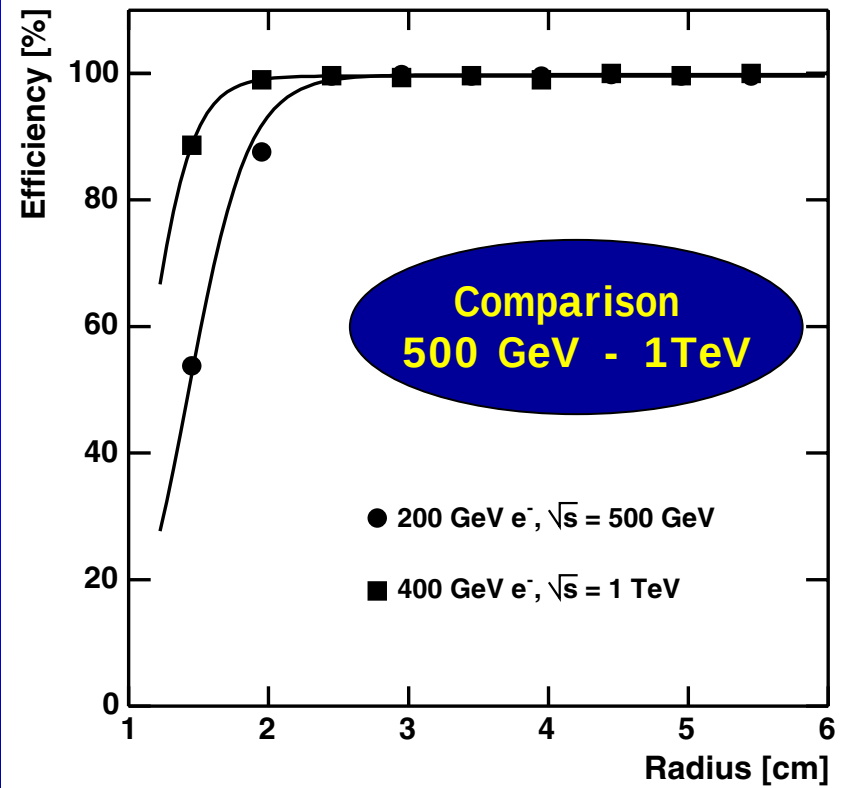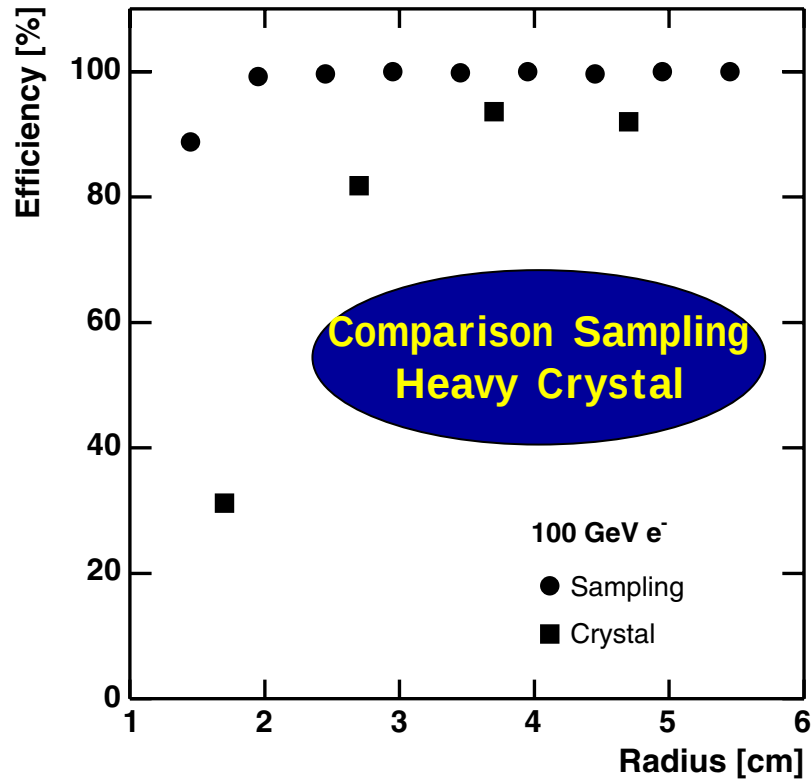

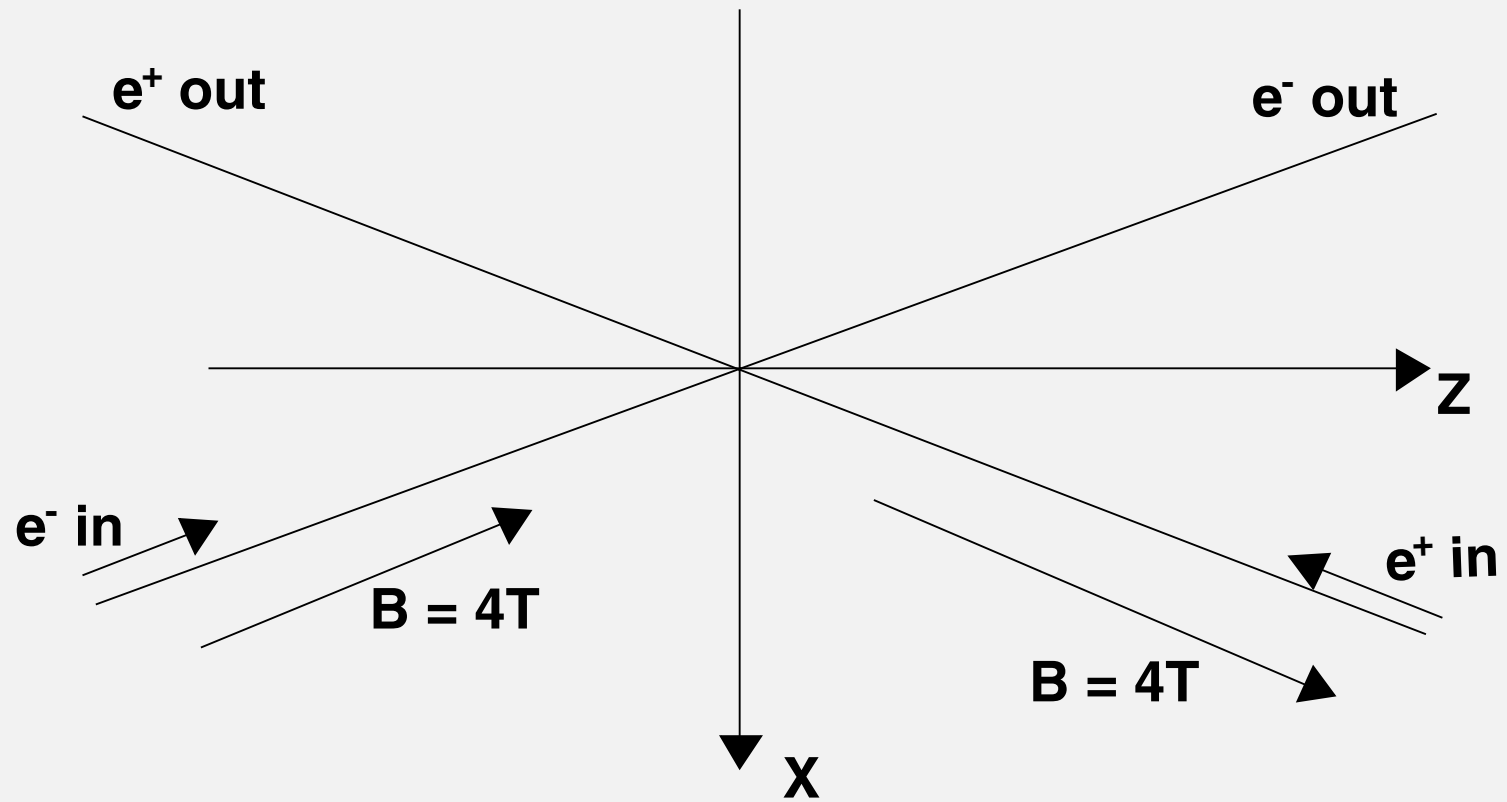


Depositions on the calorimeter frontface


Deposited Energy [GeV]

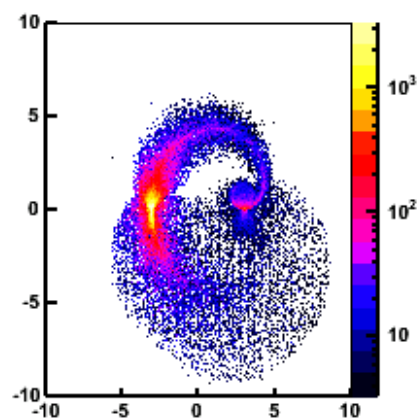


Particle Number

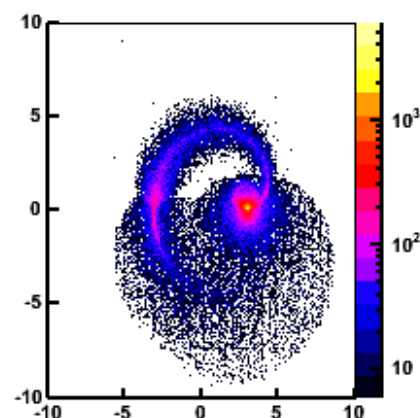

Mean particle energy [GeV]

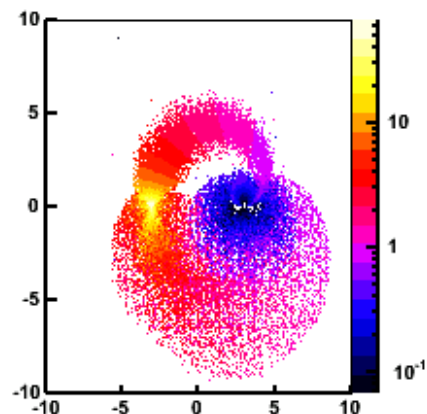

Mean helix parameter

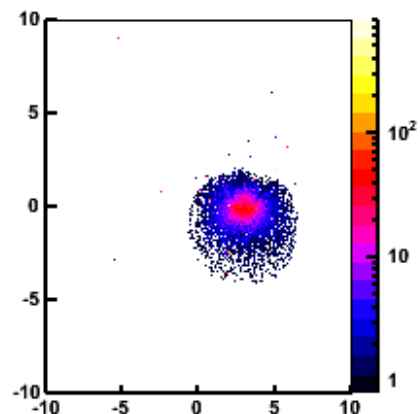

	Headon	20mrad										
BeamPar	MPI resolution	MPI resolution	σ_x	σ_x'	σ_y	σ_y'	σ_z	σ_z'	off x	off y	w y	N
σ_x (ave)	26.789	20.471	1									
σ_x (diff)	11.201	16.615	0.720	1								
σ_y (ave)	0.893	2.196	-0.182	-0.271	1							
σ_y (diff)	1.648	1.839	-0.520	-0.369	0.700	1						
σ_z (ave)	13.018	17.781	0.290	0.101	0.852	0.441	1					
σ_z (diff)	18.780	14.747	-0.032	-0.527	0.080	-0.143	-0.101	1				
Beam offset x	5.918	6.652	0.004	-0.488	0.127	-0.125	-0.036	0.887	1			
Beam offset y	0.536	6.767	0.414	0.237	-0.803	-0.927	-0.577	0.168	0.144	1		
Vertical waist shift	327.312	159.172	-0.496	0.434	0.901	0.713	0.623	0.017	-0.016	-0.748	1	
N per Bunch (ave)	0.109	0.080	0.581	0.316	0.619	0.016	0.869	0.039	0.056	-0.161	0.395	1
N per Bunch (diff)	0.043	0.054	0.481	0.631	-0.048	-0.119	0.066	0.149	0.018	0.030	-0.209	0.275