


Updates on IR and FF for super-B factory

June 15, 2006

Andrei Seryi

SLAC

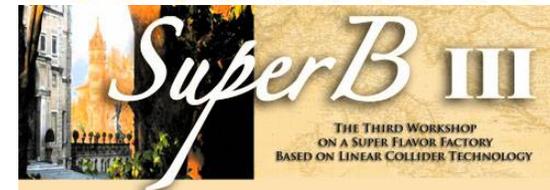


- **Not really any new work, thoughts on**
 - optics optimization
 - optimization for common FD (like in ILC 2mrad IR)
 - benefits of separate beamlines (like in ILC 20mrad IR)
 - use of antisolenoids in IR (like in ILC)

Summary from March 16 talk:



- Optics of FF can be designed
 - Requirements of the ring to aberrations in FF need to be checked
 - IR layout need to be discussed
-
- Results presented yesterday show that dynamic aperture need to be improved

Optimization of optics



- Changed optimization procedure to look simultaneously at IP and at the exit from ff and to improve symmetry
 - (assuming symmetric ff with bends and sextupoles reversed)

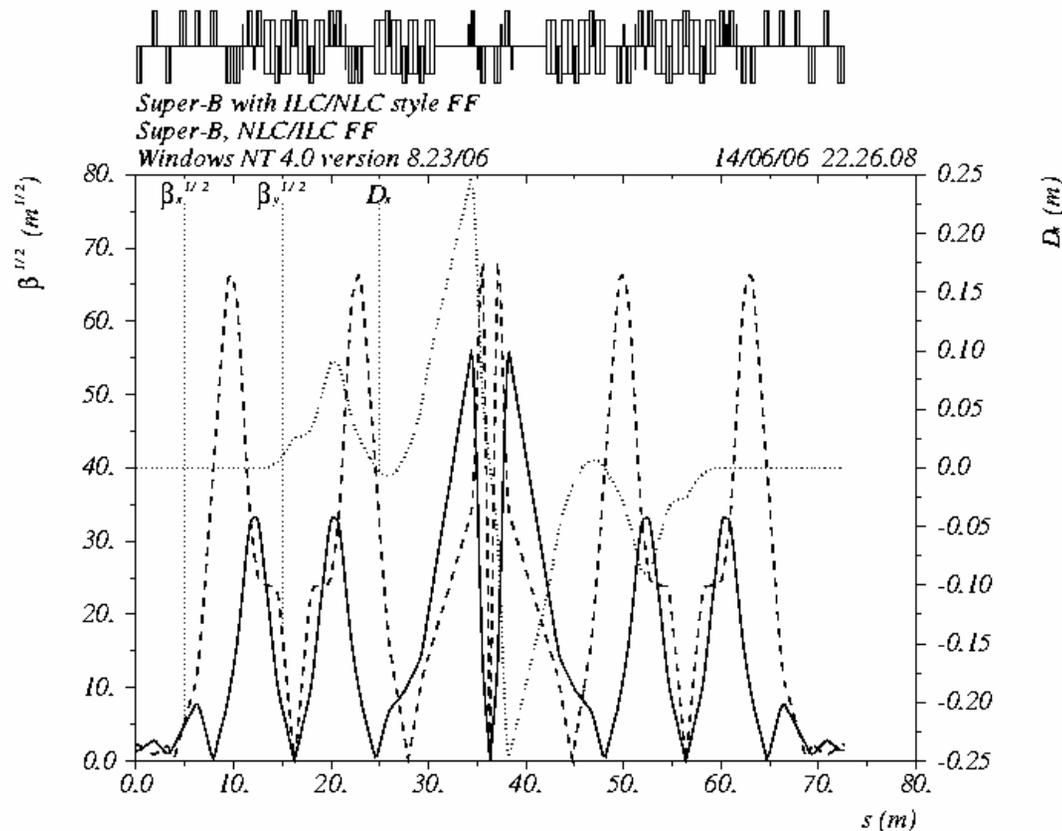

Chromaticity & second order dispersion

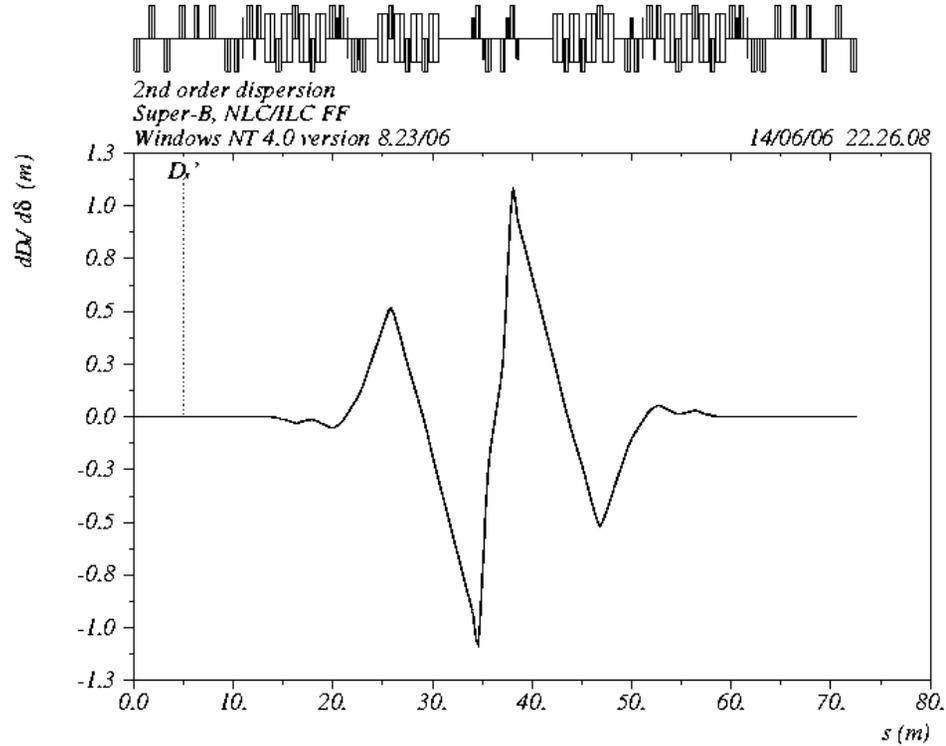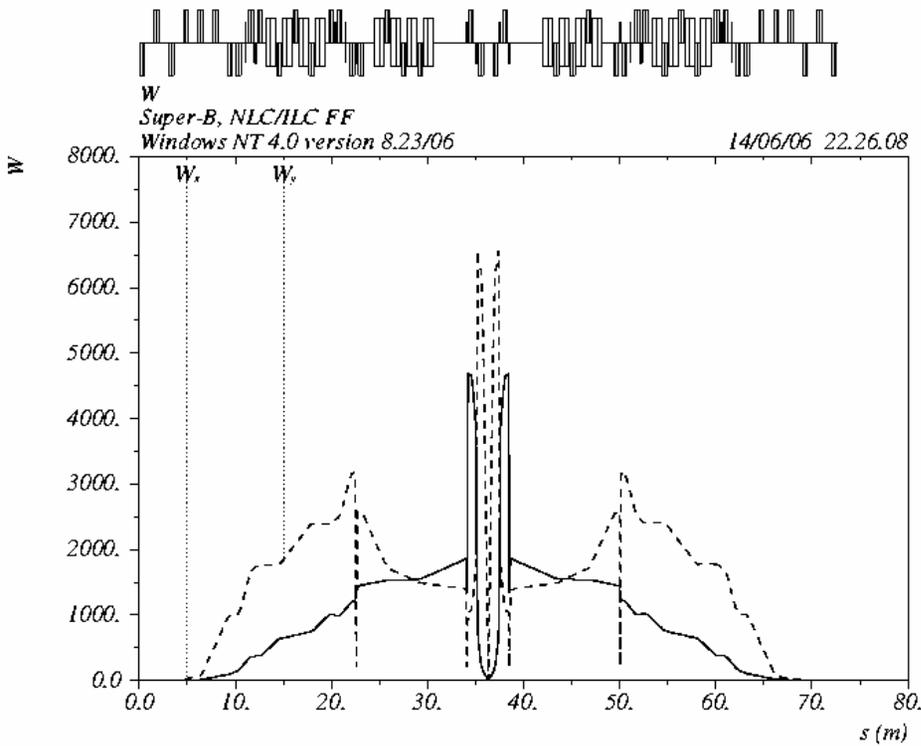


Bandwidth at IP and exit

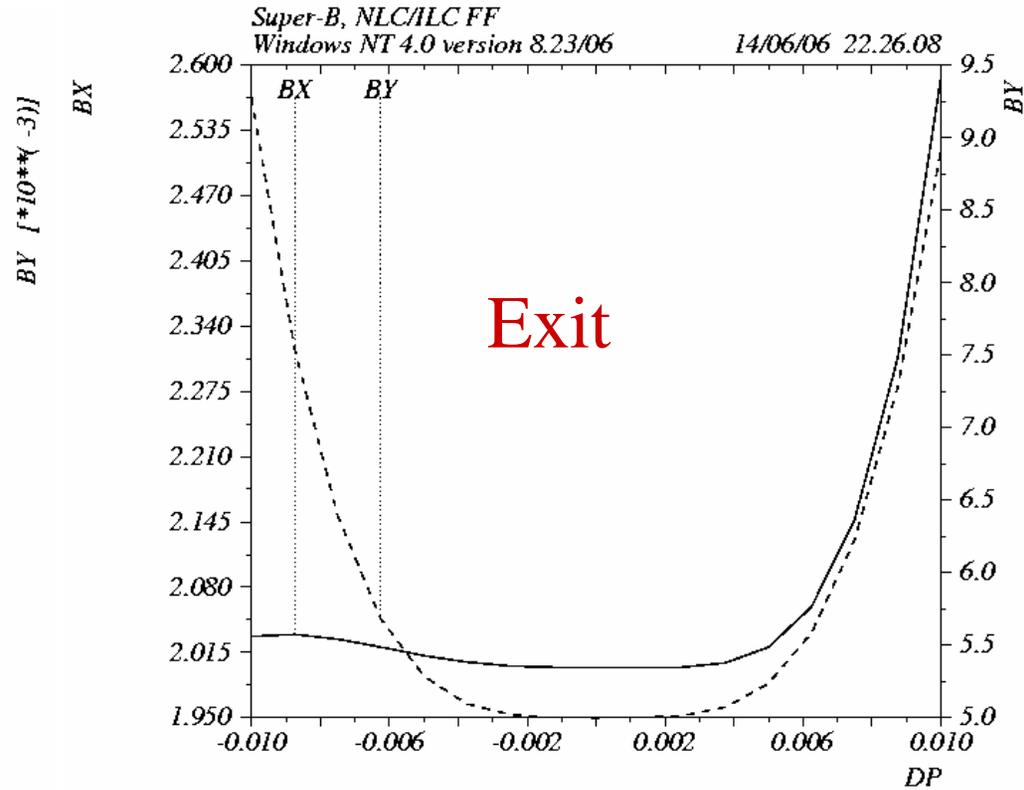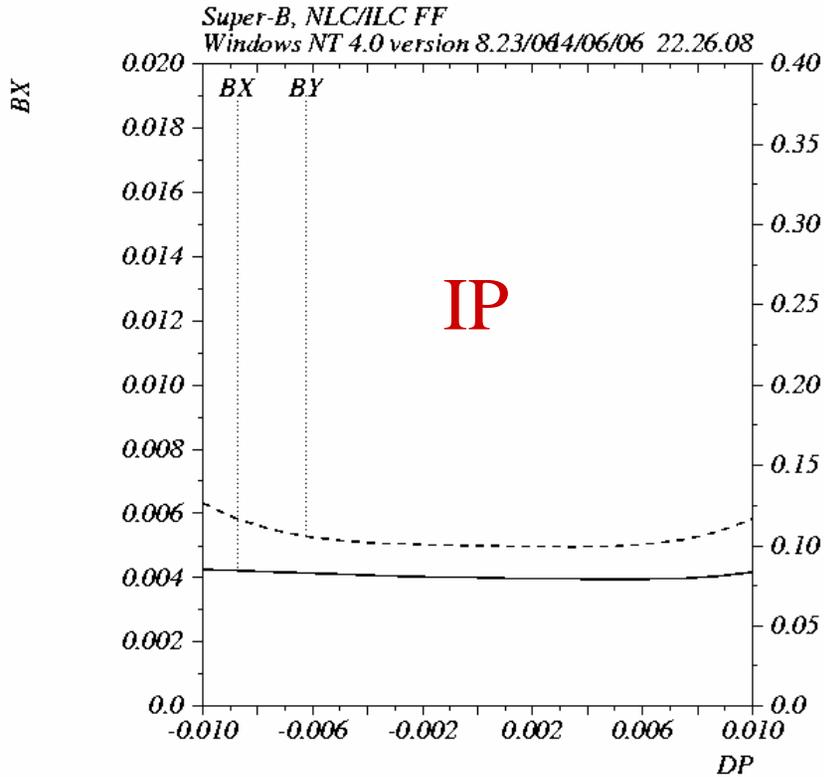

Clearly, the exit bandwidth is not great and need improvements

Aberrations and tracking

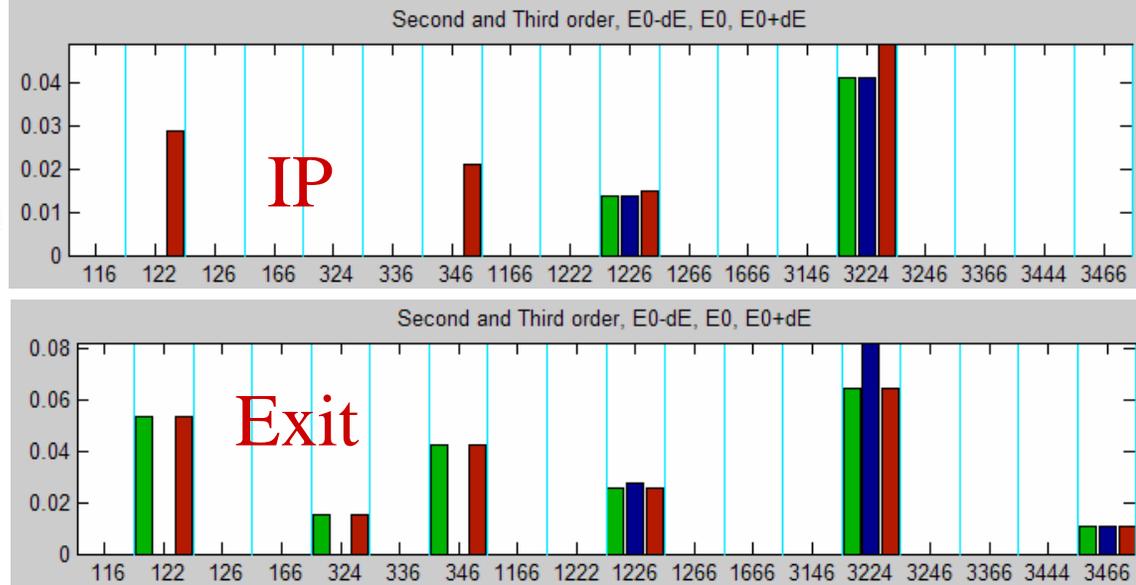

- Aberration terms from Transport
- Tracking with Turtle (100k particles, $\sigma_E=0.1\%$):

– IP

- $sgx=2.6785$, $sgy= 0.012823 \mu m$
- $sgx/x0=0.99859$ $sgy/y0= 1.0028$

May 16 results at IP:
 $\sigma/\sigma_0 = 0.99859 , 1.0087$


– Exit:

- $sgx/x0=0.99999$ $sgy/y0= 1.007$



- Further optimization require lengthening the optics

Optimization of optics if FD is common



- In ILC design one of IR has 2mrad crossing angle, where FD is common for both beams (except QF1)
- We found that one could optimize FD so that sextupole SDO give additional focusing for the disrupted beam
- That was the main reason that allowed the design of 2mrad extraction optics

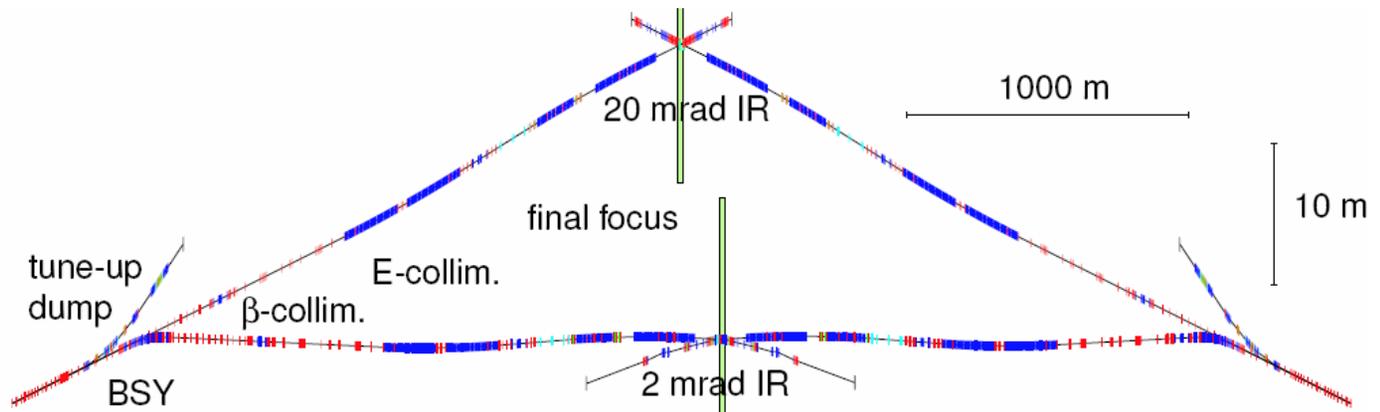


2mrad IR

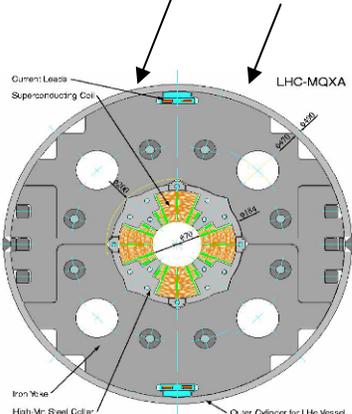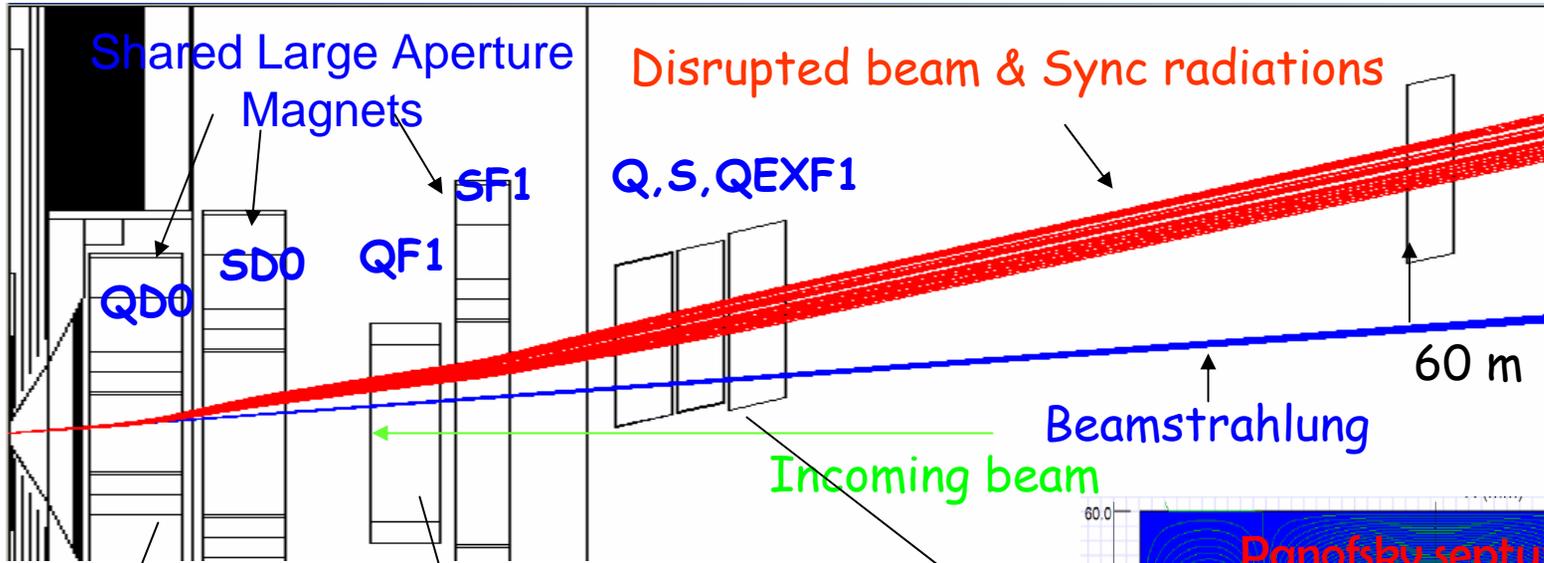

Large aperture SC quad and sextupole







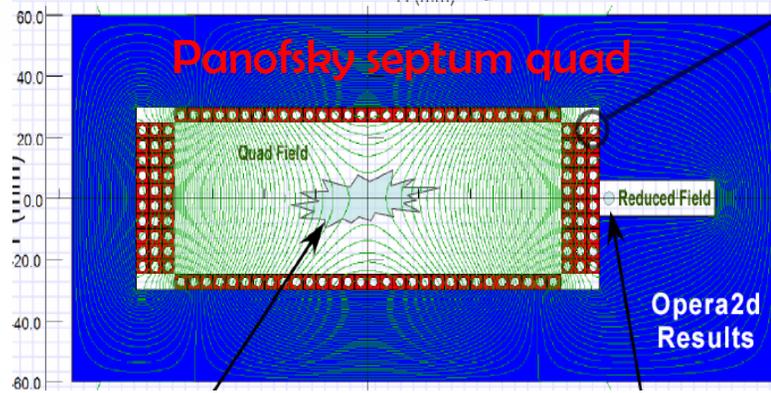
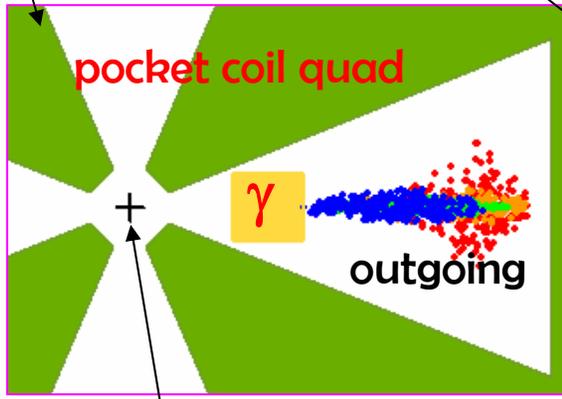


Outgoing beam in
2mrad extraction.
Beam is well contained
up to $dE = -65\%$

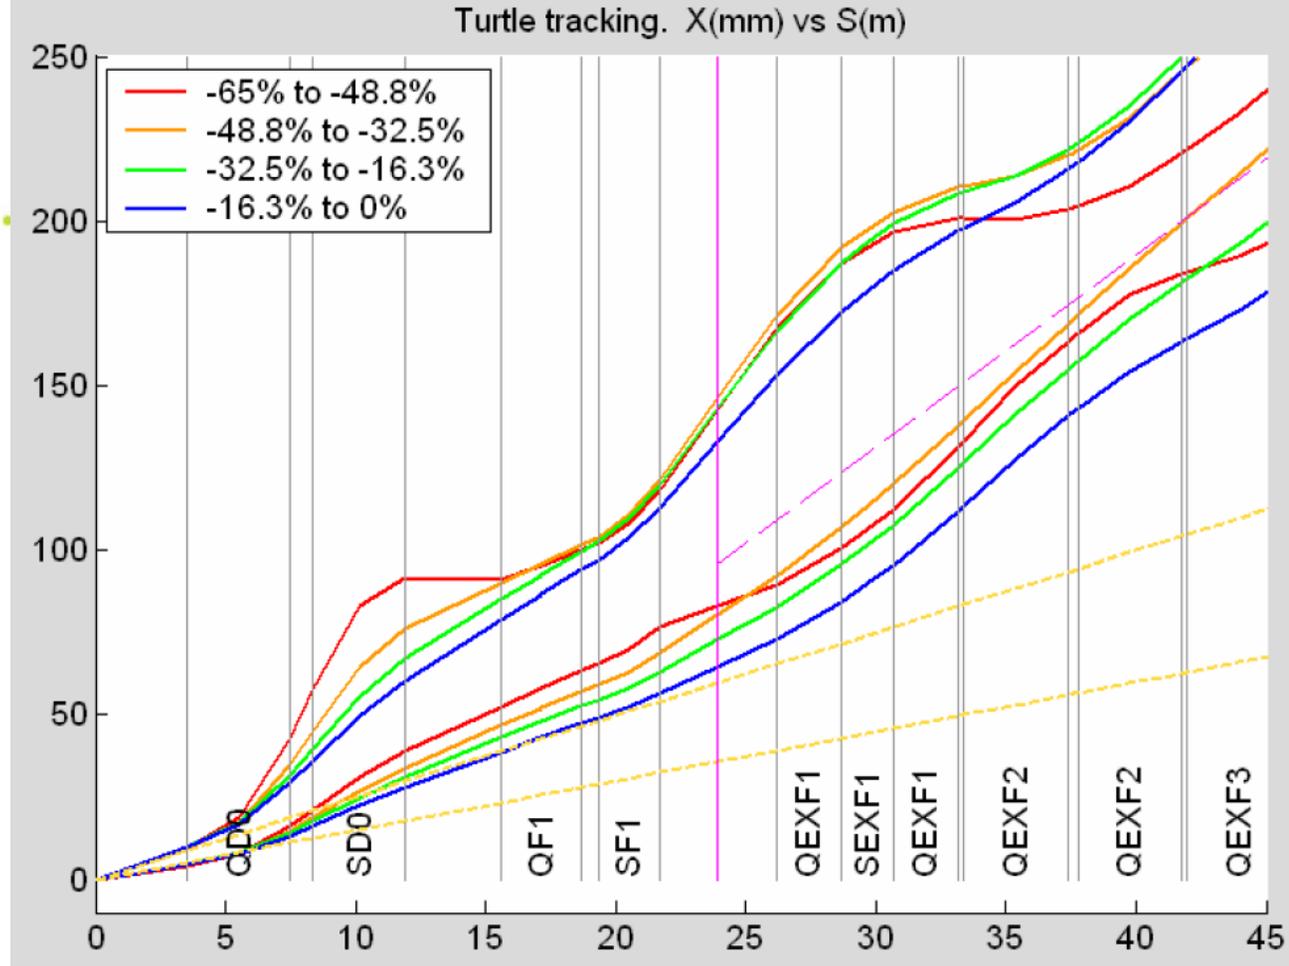

- The FD, incoming FF optics and extraction optics are optimized simultaneously
- Similar approach can be used in Super-B

at SLAC **ilc** **14mr, $L^*=3.5\text{m}$**
BNL design

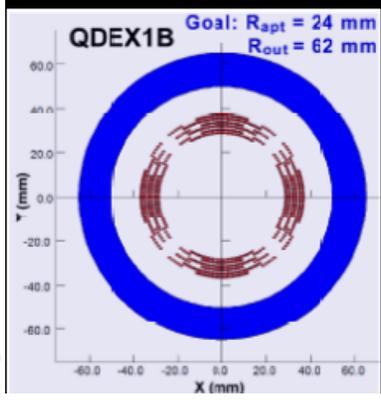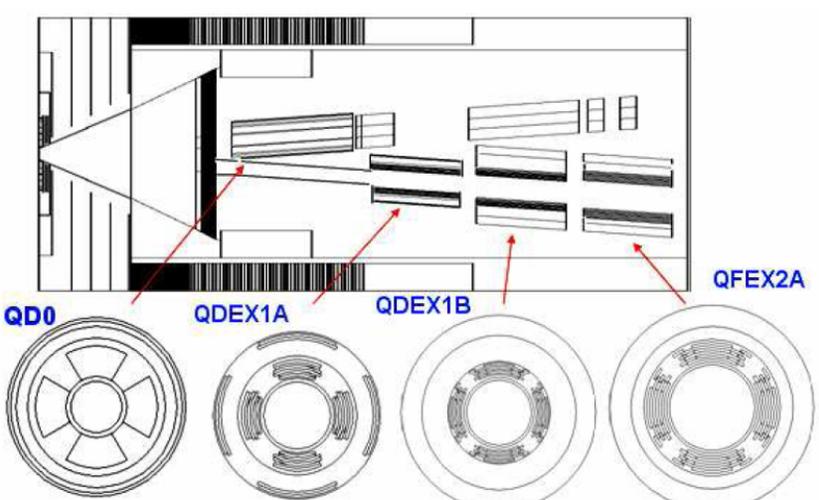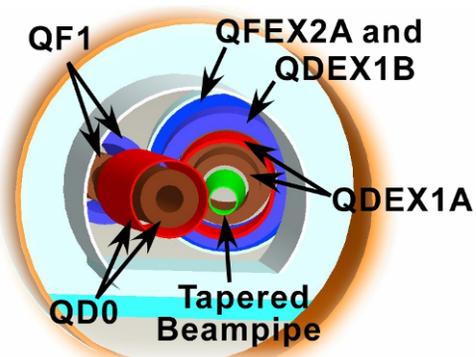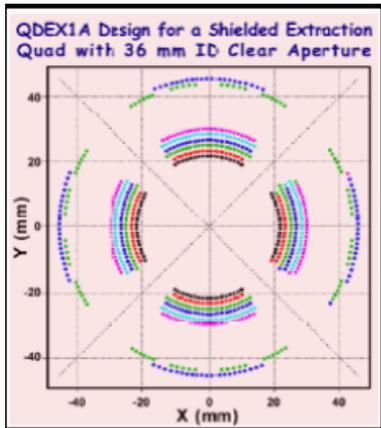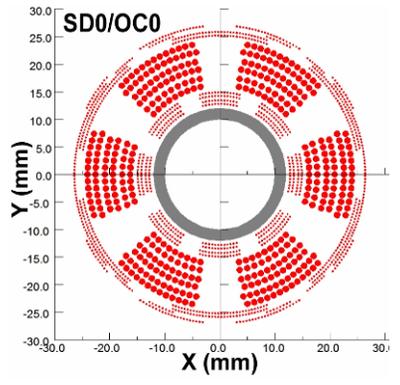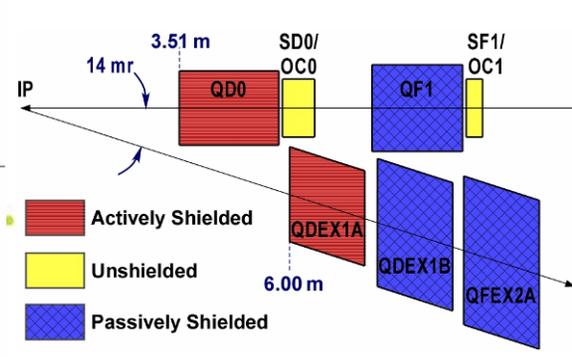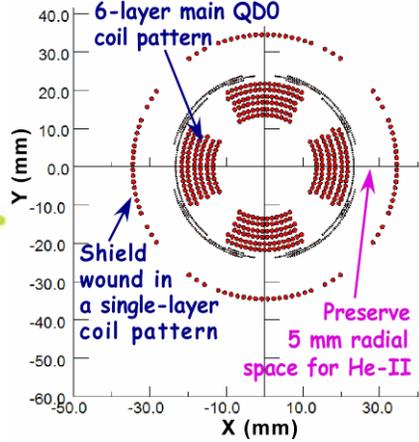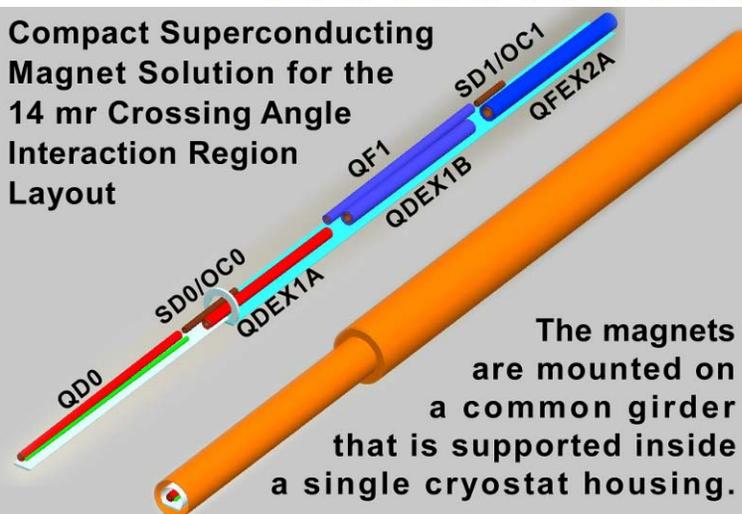


Anti-solenoid for IR


When solenoid overlaps QDO, **anomalous coupling** increases the IP beam size 30 – 190 times depending on solenoid field shape (**green=no solenoid, red=solenoid**)

Even though traditional use of skew quads could reduce the effect, the **LOCAL COMPENSATION** of the fringe field (with a little skew tuning) is the best way to ensure excellent correction over wide range of beam energies



Local correction requires anti-solenoid with special shape. The **antisolenoid is weak** since its integrated strength is much smaller than that of detector solenoid



without compensation
 $\sigma_y / \sigma_y(0) = 32$



with compensation by antisolenoid
 $\sigma_y / \sigma_y(0) < 1.01$

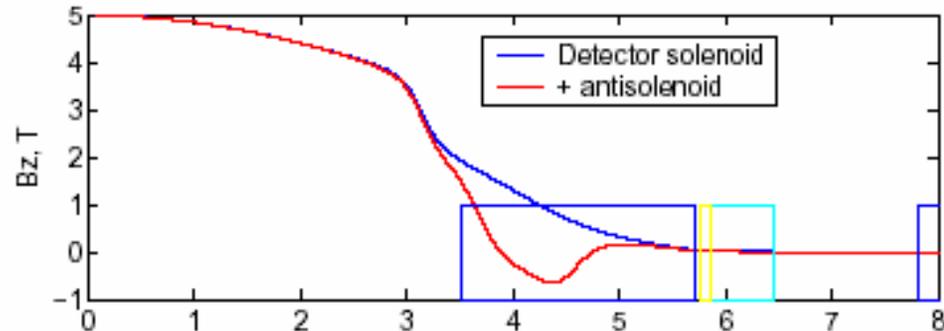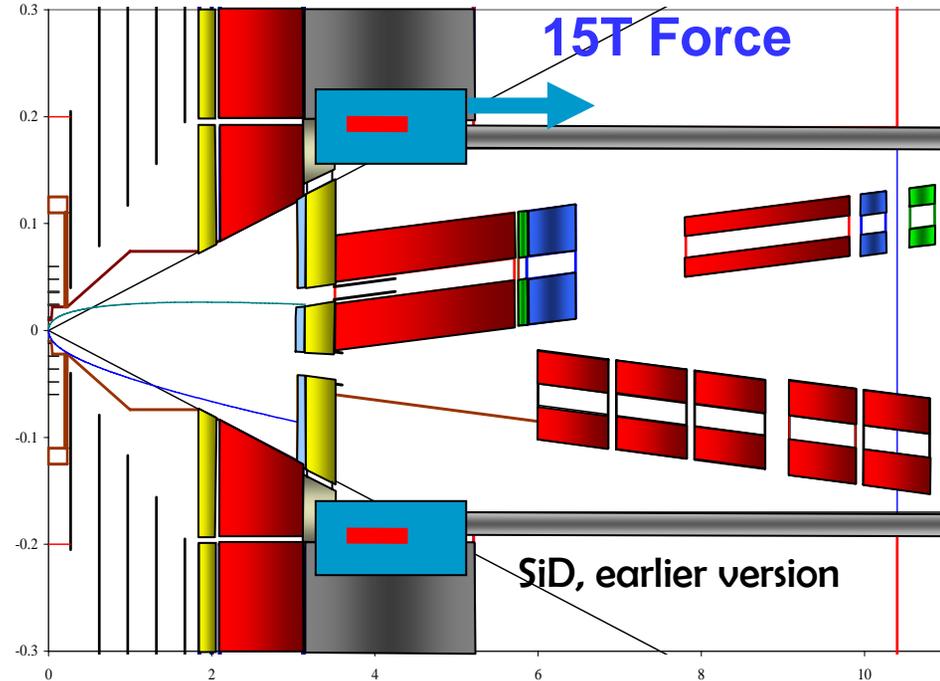

Weak antisolenoids for super-B

- Coupling due to solenoid not overlapping with FD $\sim \frac{B\ell}{2B\rho}$
 - assume 5GeV beam (16.7T*m) and $B\ell=1T$
then coupling $\sim 3\%$, very small

- If field overlap with FD by $B\ell$, coupling is


$$\approx \frac{\sigma_{xp0}}{\sigma_{y0}} \frac{B\ell}{B\rho} L^*$$

this is one of the terms. there are many other. see ref. for details

- Assume $B\ell=0.5T$, $L^*=0.8m$, $\sigma_{xp0}=0.3mrad$, $\sigma_{y0}=12.6nm$
=> coupling ~ 570 !!!
 - This coupling is about 10 times more than in ILC
 - weak antisolenoids probably unavoidable for local compensation

- (A) **Small beam size**
Obtain $\sigma_y \sim 35\text{nm}$
Maintain for long time
- (B) **Stabilization of beam center**
Down to $< 2\text{nm}$ by nano-BPM
Bunch-to-bunch feedback of ILC-like train

Designed and constructed in international manner, with contributions from all three regions

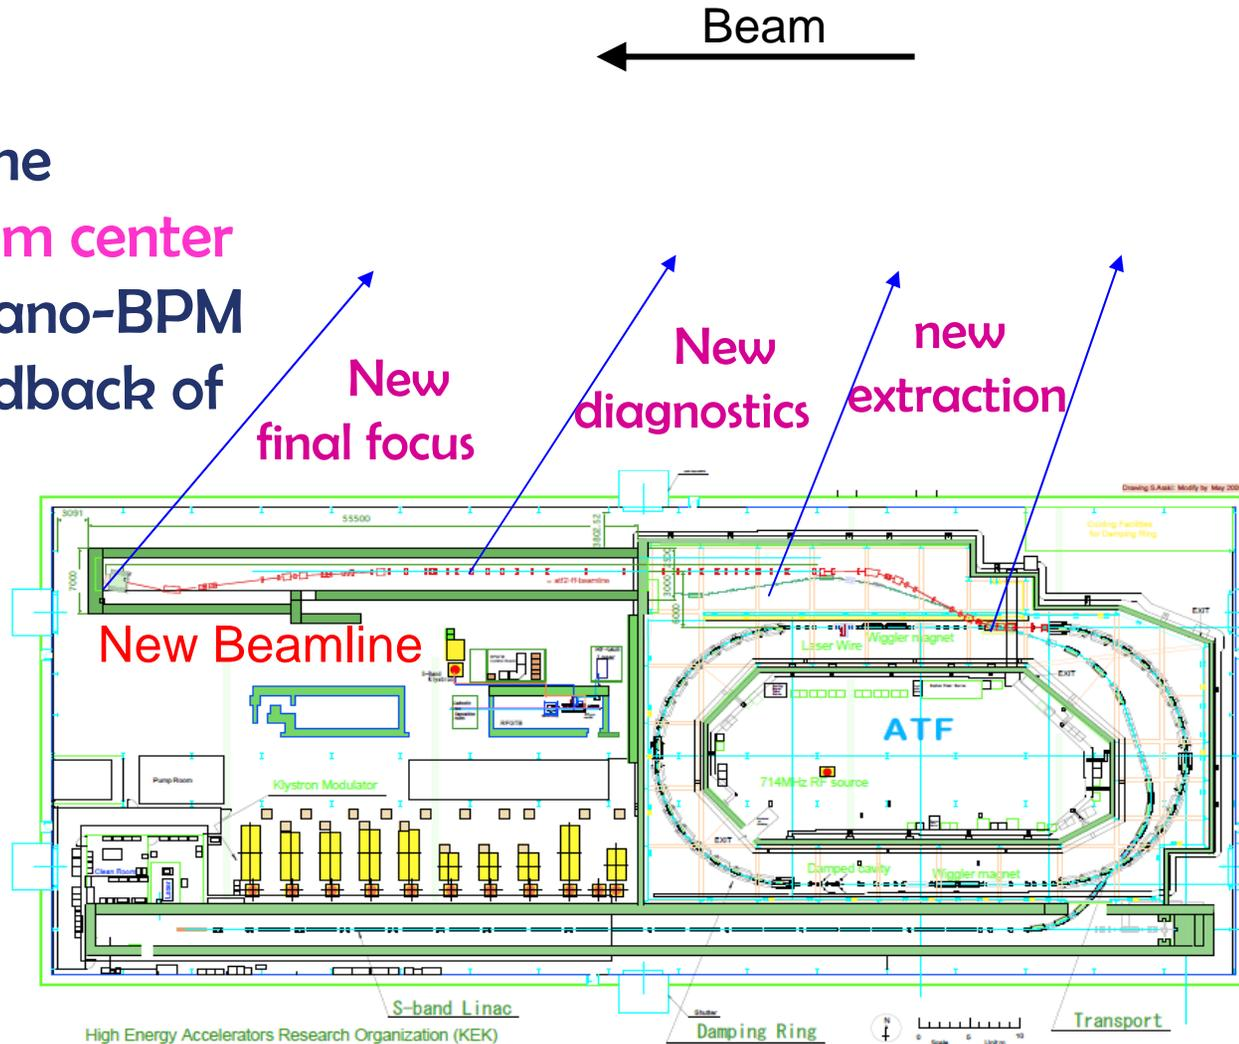

Summary

- Need to lengthen the optics to decrease aberrations in FF and improve dynamic aperture of the ring
 - there are other optics ideas (e.g. sextupole for crab) that need to be implemented
- If FD is common, optics can be optimized to improve focusing of the outgoing beam with
- Separate FD give a lot of advantages and L^* of ~0.8m or less may be possible
- Weak antisolenoids are beneficial for local compensation of coupling