

XAL-BASED APPLICATIONS AND ONLINE MODEL FOR LCLS*

P. Chu[#], M. Woodley, R. Iverson, P. Krejcik, G. White, J. Wu, SLAC National Accelerator Laboratory, Menlo Park, CA 94025, U.S.A.
Q. Gan, IHEP, Beijing, China

Abstract

XAL [1-3], a high-level accelerator application framework originally developed at the Spallation Neutron Source (SNS), Oak Ridge National Laboratory, has been adopted by the Linac Coherent Light Source (LCLS) project. The work includes proper relational database schema modification to better suit XAL configuration data requirement, addition of new device types for LCLS online modeling purpose, longitudinal coordinate system change to better represent the LCLS electron beam rather than proton or ion beam in the original SNS XAL design, intensively benchmark with MAD and present SLC modeling system for the online model, and various new features to the XAL framework. Storing online model data in a relational database and providing universal access methods for other applications is also described here.

INTRODUCTION

XAL provides the following features: a hierarchical view of an accelerator, physics modeling tool, a common look-and-feel graphical user interface (GUI), tools for easy access of EPICS [4] Channel Access (CA) protocol and database, and many other utility packages. In order to take advantage of the XAL accelerator hierarchy, one has to prepare all necessary data in the XAL format.

The XAL online model at SLAC has been improved to accurately model an electron beam accelerator, several miscalculations of physics parameters have been fixed and changes were made to accommodate the different longitudinal coordinate system.

The SLAC implementation of the XAL model was also required to be compatible with the existing Stanford Linear Collider (SLC) online model system so that existing applications would continue to work. The SLC model did not run in real time, but on demand so a database infrastructure and access system was setup for the XAL model data.

DATABASE SETUP

There are two major database schemas set for XAL and its model. The first one is for XAL input configuration and the second one is for storing XAL model run output data for other applications to pick up.

XAL Configuration

*Work supported in part by the DOE Contract DE-AC02-76-SF00515.

This work was performed in support of the LCLS project at SLAC.

[#]pchu@slac.stanford.edu

The XAL data structure is based on hierarchical view of an accelerator, whereas most modern data storage uses relational databases. A mapping between the XAL data structure and database is needed. Usually a database query along with such a mapping is performed to create an XAL formatted XML file. This XML file is then served as the base configuration file for all XAL needs. The data extracted from database are mainly from two views: *elements* and *symbols*. The elements view contains information for each hardware device such as physics name and EPICS device name. Data for the MAD optics design lattices are saved in the symbols view. These views were modified to add XAL specific entries such as beam line sequence and distance from the start of the sequence. Figs. 1 and 2 show screen snapshots for an XAL database browsing utility. The left panel shows the schema, the middle panel shows the tables and views for the selected schema and the right panel shows part of the columns in the elements and symbols views.

Name	Primary/Key	Nullable	Type	Width
ELEMENT_ID	NO	NO	NUMBER	5
ELEMENT	false	NO	VARCHAR2	18
FIRST_SOURCE	false	NO	VARCHAR2	30
ELEMENT_TYPE	false	YES	VARCHAR2	9
ACTIVE_FLAG	false	YES	VARCHAR2	1
ELEMENT_COM	false	YES	VARCHAR2	200
AREA	false	YES	VARCHAR2	11
KEYWORD	false	YES	VARCHAR2	4
ENGINEERING	false	YES	VARCHAR2	60
SYMBOLS_UPL	false	YES	NUMBER	7
LTU_UPLOAD_ID	false	YES	NUMBER	7
SUMM_M	false	YES	NUMBER	22
SUMM_FT	false	YES	NUMBER	22
LINACZ_M	false	YES	NUMBER	22
LINACZ_FT	false	YES	NUMBER	22
LTU_SUMM_M	false	YES	NUMBER	22
LTU_SUMM_FT	false	YES	NUMBER	22
LTU_LINACZ_M	false	YES	NUMBER	22
LTU_LINACZ_FT	false	YES	NUMBER	22
MAD_SUMM_M	false	YES	NUMBER	22
MAD_SOLID_E	false	YES	NUMBER	22
MAD_SUMM_FT	false	YES	NUMBER	22
MAD_SOLID_E	false	YES	NUMBER	22
NONMAD_SUMM	false	YES	NUMBER	22
NONMAD_SOLL	false	YES	NUMBER	22
NONMAD_SUM	false	YES	NUMBER	22
NONMAD_SOLL	false	YES	NUMBER	22
NONMAD_SOLL	false	YES	VARCHAR2	200
SLC_MICRO_N	false	YES	VARCHAR2	200
LOC_LOC	false	YES	VARCHAR2	200

Figure 1: LCLS elements view from Oracle database.

Name	Primary/Key	Nullable	Type	Width
ID	NO	NO	NUMBER	7
UPLOAD_ID	false	YES	NUMBER	7
SOLID_EDGE_ID	false	YES	NUMBER	7
AREA	false	YES	VARCHAR2	6
KEYWORD	false	YES	VARCHAR2	4
ELEMENT	false	YES	VARCHAR2	16
ENGINEERING	false	YES	VARCHAR2	60
EFFECTIVE_LE	false	YES	NUMBER	22
APERTURE	false	YES	NUMBER	22
ANODE	false	YES	NUMBER	22
K1	false	YES	NUMBER	22
K2	false	YES	NUMBER	22
TILT	false	YES	NUMBER	22
E1	false	YES	NUMBER	22
E2	false	YES	NUMBER	22
H1	false	YES	NUMBER	22
H2	false	YES	NUMBER	22
ENERGY	false	YES	NUMBER	22
SUMM	false	YES	NUMBER	22
SOLID_EDGE_X	false	YES	NUMBER	22
SOLID_EDGE_Y	false	YES	NUMBER	22
SOLID_EDGE_Z	false	YES	NUMBER	22
SOLID_EDGE_X	false	YES	NUMBER	22
SOLID_EDGE_Y	false	YES	NUMBER	22
SOLID_EDGE_Z	false	YES	NUMBER	22
REVISION	false	YES	NUMBER	3
REVISION_DATE	false	YES	DATE	7
ELEMENT_ID	false	YES	NUMBER	5
RF_FREQUENCY	false	YES	NUMBER	22
BE_AMPLITUDE	false	YES	NUMBER	22

Figure 2: LCLS symbols view from Oracle database.

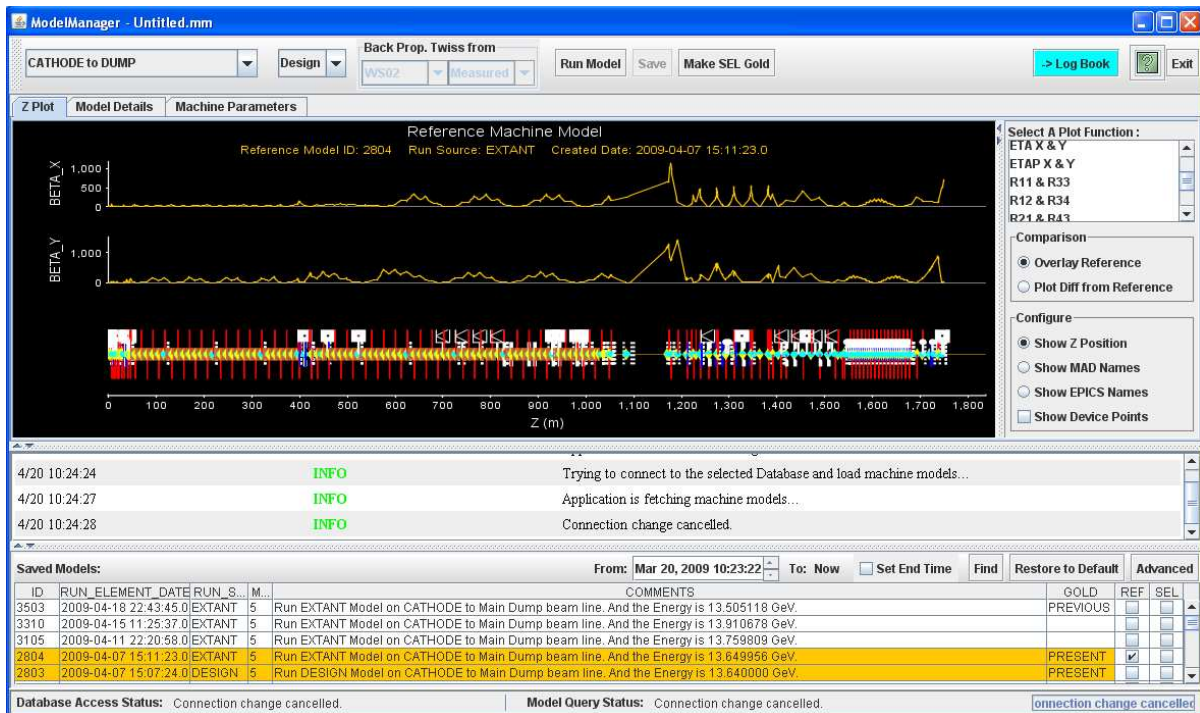


Figure 3: Model Manager application for running, viewing and saving the XAL. The top tool bar is for running the model, the middle panel is for data display and the bottom panel is for selecting available models from database. The data panel shows an example of extant machine β -function over the entire LCLS.

The database to XAL data structure mapping within our present schema is still being completed in order to automate some integrated field to field conversion factors.

XAL Model Data

The XAL online model data is uploaded to an Oracle database [5] for other applications to pick up. An easy interface, Accelerator Integrated Data Access (AIDA) [6], provides a universal way to access the model data stored in the database. Currently, there are four beam-line modes, ‘Cathode to Main Dump’, ‘Cathode to Gun Spectrometer’, ‘Cathode to 135-MeV Spectrum Dump’ and ‘Cathode to 52SL2’. Each beam line may be modeled using design parameters or extant values for the devices as the data source. For each beam-line and data source, a Gold tag is introduced to indicate the default model to be used by other applications for that beam-line and data source combination.

ONLINE MODEL

The XAL online model [7] was first written for a spallation neutron source with H⁻ or proton beam. The transfer map computation was based on TRACE 3-D [8] algorithm. On the other hand, LCLS is a light source with electron beam and unique devices such as undulators. The LCLS electron beam velocity is highly relativistic; therefore, the longitudinal coordinate has to be in the reference particle frame.

Transfer Map

The LCLS design and the SLC model system are based on MAD optics calculations, so any new model system

should follow the same calculations. Transfer matrices for the following modeling elements in XAL were modified based on the MAD algorithm [9]:

- Bend dipole
- RF accelerating gap
- Solenoid magnet
- Drift space

These new maps were also added:

- SLAC RF cavity
- Undulator segment with vertical focusing and no energy loss.

Particular attention was paid to handling the edge effects for bend dipoles and RF cavity/accelerating gaps when these elements are split within the program. After our modifications the transfer matrices computed by XAL and MAD are nearly identical.

Twiss Parameters

Together with the correct transfer matrix computation, the Twiss parameters are now computed with proper relativistic correction.

Benchmark Comparison

After the transfer map modifications described above, the XAL model was carefully compared with the MAD model in term of energy calculation, R-matrix and other physics parameters. Initially the Twiss parameters did not agree well enough, so we took the R matrices from XAL, computed Twiss parameters in a Matlab script outside XAL and loaded them back to XAL model. We have now modified the XAL Twiss parameter calculation so that the entire process is handled by the new LCLS XAL model.

Fig.4 shows a comparison between this version of XAL model and MAD throughout the entire LCLS main beam-line, from gun to undulator. There is slight difference near the largest β -function (>500 m). After careful study, we have confidence that the XAL model does the right calculation.



Figure 4: XAL model versus MAD model.

Figure 4: β -function comparison between MAD and XAL model. The plots show horizontal (top) and vertical (bottom) β -function along the entire LCLS. Red curves from MAD are overlaid on blue ones from XAL.

Chicane magnets

Typically, the XAL online model assumes that the reference trajectory always follows the design bend angle while passing through a chicane magnet. For LCLS, the energy variation can be quite large and, therefore, this assumption is no longer valid for the live machine. The reference angles are therefore dynamically adjusted according to the ratio of the live field to the design field.

Acceleration Structure

At present, the LCLS control system does not provide EPICS CA signals for most of its RF cavities. A separate routine is written to query the old SLC control system for the klystron settings via AIDA. This routine calculates the phases and amplitudes for all the accelerating cavities based on klystron information as well as five well-defined reference energy points. The result is inserted into the XAL model.

Reference point Twiss Back Propagation

The beam-line tracking that starts at the cathode of the 6 MeV gun in the LCLS suffers from inaccurate modeling of the space charge effects and would result in unrealistic Twiss parameters being propagated downstream. A more accurate method that we have adopted for the online modeling is to take the measured Twiss parameters at a point far enough downstream for space charge effects to disappear and then back propagate this beam to the cathode. This beam is then propagated down the length of

the machine to give an accurate representation of the Twiss parameters in the extant lattice. The back propagation of this beam through the solenoid at the low-energy gun requires that solenoids are treated as drift spaces in this procedure, since the conventional Twiss parameters we use do not include coupling terms that a solenoid would introduce. This has not been a problem for us since the optics of interest during machine operation are all downstream of the gun solenoid.

APPLICATIONS

The LCLS XAL model is now the primary online model for LCLS operation. Two XAL-based Java applications are the mainstays of control room operation, the Orbit Display and the Model Manager GUI (Fig. 3). The XAL model Application Programming Interface (API) means that online model data is now also used by a host of other programs in the control room including the Linac Energy Management program (LEM) and a number of other Matlab scripts used for emittance measurement and beta matching. The accessibility of online XAL model data to Matlab applications has allowed LCLS to rapidly prototype many new applications. Model data can also be exported to spreadsheet files for offline analysis. Future plans include enhancements to the database schemas and further optimization of the model run performance time.

ACKNOWLEDGEMENTS

The authors would like to thank the LCLS Physics, Controls and Database groups for their great efforts in providing us various hardware and software support. All the other members in the SLAC High Level Application group deserve much credit for their valuable suggestions and help.

REFERENCES

- [1] <http://sourceforge.net/projects/xaldev/>.
- [2] <https://wiki.ornl.gov/sites/xaldocs/default.aspx>.
- [3] J. Galambos, *et al*, "XAL Application Programming Structure," p. 79, Proceedings of 2005 Particle Accelerator Conference.
- [4] <http://www.aps.anl.gov/epics/>.
- [5] G. White, *et al*, 'Device and Accelerator Modeling Relational Database', these proceedings.
- [6] <http://www.slac.stanford.edu/grp/cd/soft/aida/>.
- [7] C. K. Allen, "Theory and Technique of Beam Envelope Simulation", Los Alamos National Laboratory Internal Report LA-UR-02-4979 (2002).
- [8] K. R. Crandall and D. P. Rusthoy, "TRACE 3-D Documentation", Third Edition, Los Alamos National Laboratory Internal Report LA-UR-97-886 (1997).
- [9] F. C. Iselin, 'The MAD Program Physical Methods Manual', CERN Internal Report CERN/SL/92 (1994)