

TRAVELING WAVE STRUCTURE OPTIMIZATION FOR THE NLC*

Zenghai Li, Karl L. Bane, Roger H. Miller, Tor O. Raubenheimer, Juwen Wang, Ronald D. Ruth,
SLAC, USA

Abstract

The JLC/NLC linac must accelerate multi-bunch beams in order to obtain a luminosity of $10^{34}\text{cm}^{-2}\text{sec}^{-1}$ or higher at a center of mass energy of 1 TeV. It is essential in the structure design to minimize the long and short-range dipole wakefields to prevent emittance degradation and the beam breakup instability (BBU). In addition, the structures must operate at a high RF gradient to minimize the linac cost. High-power testing of prototype structures at SLAC has shown noticeable damage. The damage is largest in the front of the structure, where the group velocity is high, and there is minimal or no damage at the back end, where the group velocity is low. Theoretical analysis using a simple circuit model suggests using structures with a lower group velocity, on the order of a few percent, would be a way of avoiding damage. For the standard $2\pi/3$ accelerating mode, it is difficult to lower the group velocity without losing efficiency or increasing the wakefields. With this in mind, we have taken the phase advance as an additional parameter in structure optimization. We found that a low group velocity structure at higher phase advance can maintain high RF efficiency and low wakefields. In this paper, we study the impact of phase advance on structure performance. We then optimize the NLC S-band and X-band structures to meet design requirements.

1 INTRODUCTION

The NLC[1] is an e^+e^- collider designed to provide a luminosity of $10^{34}\text{cm}^{-2}\text{sec}^{-1}$ or higher at a center-of-mass energy of 500GeV to 1TeV. The linacs of such a project must be able to accelerate high-current multi-bunch beams efficiently and cleanly, and keeping options of operating with both 1.4-ns and 2.8-ns bunch spacings. The emittance degradation and breakup instability of the beams in the linac depend on both the wakefields and the alignment of the RF structures. To achieve a realistic alignment tolerance for the structures, we need to design the structures with low dipole wakefields. The NLC consists of three types linacs, operating at L-band (1.428-GHz), S-band (2.856-GHz) and X-band (11.424-GHz) frequencies. While less important at L-band, minimizing the dipole wakefields in both the S-band and X-band structures is a major design issue. The stringent requirement on the dipole wakefields has a direct impact on the choice of basic structure parameters. The high gradient requirement for the X-band structures puts additional constraints on the design. Tradeoffs need to be made between RF efficiency, wakefields and breakdown

limitations. In this paper, we will try to address some of the structure design issues. We will use the phase advance as an additional parameter in structure optimization to meet the design requirements.

2 DESIGN CONSIDERATIONS

1 Structure aperture: a

The aperture of the structure is constrained by single-bunch wakefields, which scale as $a^{-3.8}$. BNS damping can effectively suppress the associated head-tail effects by accelerating the beam off-crest to induce a correlated energy spread across the bunch. The BNS phase and the residual of the BNS damping become larger as the iris aperture becomes smaller. The requirements on emittance and RF efficiency set a lower bound on the structure aperture [2]. It is shown in Ref. 2 that the aperture of the X-band structure cannot be smaller than 0.18λ .

2 Dipole mode detuning

De-coherent cancellation among the dipole modes is realized by detuning the modes in a prescribed manner in order to suppress the long-range dipole wakefields. In addition to the detuning, there are specific requirements on the dispersion relations of the dipole modes in order to obtain a smooth spectrum such that effective wakefield suppression will extend over a longer distance. To achieve this, the bandwidth of the dipole modes at the zero phase advance is required to overlap the bandwidth at the π phase advance, such that the modes that touch the ends will not be synchronous with the beam and therefore have low kick factors. In another word, slopes of the dispersion curves are required to change sign along the structure. Fig. 2 shows one example that satisfies this criterion. Shown in the figure are dispersion curves for 5 representative cells along the structure (notice the change in slopes). The modes at the two ends are far from the synchronous phase.

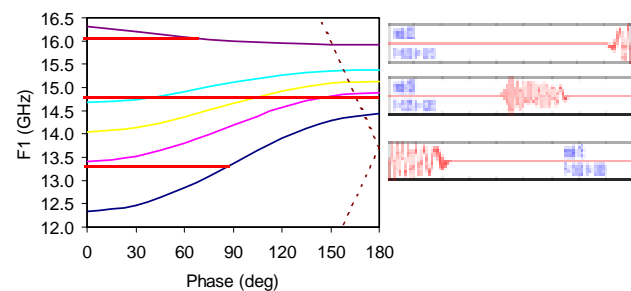


Figure 1 Dipole dispersion and typical modes in a traveling wave structure.

* Work supported by the U.S. DOE Contract No. DE-AC03-76SF00515.

3 Group velocity

The structures need to operate at high gradient reliably. High power tests on the X-band prototypes have shown noticeable breakdown damage. Studies using a simple circuit model [3] suggested that the structures need to be low in group velocity in order to reduce this damage. The idea is to reduce the amount of energy that can go into an individual breakdown, minimizing the surface erosion. The present thought is to design the X-band structure with a group velocity of about 0.05c or 0.03c, as compared to the 0.12c for the RDDS1 structure.

4 Structure filling time t_f

The optimal filling time of a traveling wave structure depends on the ratio of the beam loading and the RF acceleration voltages. In a constant gradient structure, the beam-loading gradient and the RF gradient are given by

$$G_b = -\frac{I_0 r}{2} \left(1 - \frac{2\tau e^{-2\tau}}{1 - e^{-2\tau}}\right)$$

$$G_{rf} = \sqrt{\frac{P_{in} r}{L} (1 - e^{-2\tau})}$$

where $\tau = \alpha_f/2Q$ is the attenuation factor. For a given center of mass energy at the interaction point, the RF efficiency is proportional to G_L/U_{rf} with $G_L = G_{rf} - G_b$ the loaded gradient and $U_{rf} = P(t_f + t_b)$ the energy stored in the RF pulse. For the NLC RF power and beam loading parameters, the τ dependences of these functions are plotted in Fig.1.

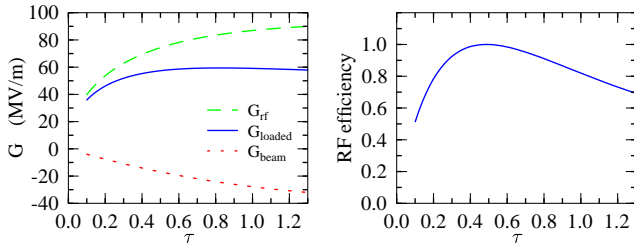


Figure 2 Gradient and efficiency as functions of τ . The beam loading current is 0.9-amp. The RF power per unit structure length is 97-MW.

The optimal τ is in between 0.4 to 0.6. The lower efficiency at a larger τ is due to large beam loading and more stored energy in the RF pulse. The X-band structure will be designed with a τ of about 0.5, which corresponds to a filling time of ~100–ns.

3 IMPACT OF PHASE ADVANCE

With the standard $2\pi/3$ phase advance, it is difficult to design structures to meet all the constraints. For this reason, we have taken the phase advance of the acceleration mode as an additional parameter. The impact of phase advance on some of the RF parameters (X-band) are shown in Fig. 3.

The three curves correspond to three cells with different iris radii. The shunt impedance has a broad optimal between 120 to 150 degree phase-advances, with

a slight dependence on iris opening. The dipole modes are detuned by a similar amount at these phases. The group velocity of the fundamental mode, which is proportional to $\sin(\phi)$ as expected, can be lowered effectively by designing the structure to have a high phase-advance. The group velocity of the dipole mode, which is not shown here, is also sensitive to the phase advance, which can be used as a knob to tune the dispersion properties of the dipole modes. The kick factors are lower in the high phase advance design, which is a plus for minimizing the dipole wakefield.

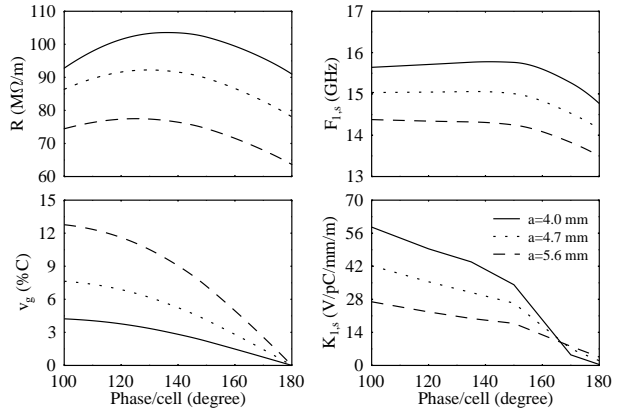


Figure 3 RF parameters v.s. phase advance for three aperture openings at X-band

5 S-BAND STRUCTURE

The $3\pi/4$ mode was chosen for the S-band pre-linac structure[4]. The choice of this phase advance is to resolve two design difficulties: 1) to generate proper dipole modes to suppress wakefields for both 1.4-ns and 2.8-ns bunch spacings; 2) to optimize the filling time for RF efficiency. Since the dipole frequency at S-band is four times lower than at X-band, significantly reducing the wake envelope at one bunch spacing following the driving bunch by detuning alone is difficult. The way to minimize the wakefield in the design is to put the bunches at zero crossings of the wakefield, which requires a center frequency of 3.93-GHz for the dipole modes. This is about 2% lower than the optimized design with $2\pi/3$ phase advance. Shifting the frequency by opening up iris will lead to a 7% loss in RF efficiency due to a shorter filling time. The dipole dispersion properties also become problematic. At $3\pi/4$ phase advance, we can lower the dipole frequency effectively with a large aperture while keeping a good filling time, improving RF efficiency. The dipole dispersion can also be design to satisfy the requirements as mentioned in Sec.2, see details in Ref.[4].

6 LOW V_G X-BAND STRUCTURE

The X-band structure needs to have a starting group velocity of 0.05c-0.03c (v_{g5}, v_{g3}) to cope with the breakdown damage problem. With the $2\pi/3$ mode, it is difficult to design a structure with an average iris aperture of $a/\lambda=0.18$ without loosing significant RF efficiency.

This leads to the choice of higher phase advance, taking the advantages of low group velocity and high shunt impedance. The concern with higher phase advance is the narrower bandwidth since the synchronous phase now is closer to π -phase. The dispersive effect due to the narrower bandwidth limits how high the phase advance can be. The $5\pi/6$ (150 degree) is chosen for the present design. With this mode, the $0.05c$ group velocity can be easily obtained for $a/\lambda=0.18$. For the $0.03c$ design, one needs a thicker disk, with a little reduction in shunt impedance.

1 Structure length

To obtain an optimal filling time, the structure length should scale roughly proportional to the group velocity. Simple scaling from the RDDS1[5,6] which has a group velocity of $0.12c$, the length of vg5 and vg3 structures would be about 0.75-m and 0.45-m respectively. Since the ends of the structure dominate the cost, longer structures are desirable. A reasonable choice of structure length is thought to be 0.9 meters. For the vg5 structure, this length can be reached by slightly extending the filling time. While for the vg3 structure, we used a reversed taper on the disk thickness (from thick to thin) to maximize the average group velocity. On the other hand, with a fixed input power per unit length, the input power per structure is higher for a longer length. To minimize the breakdown damage (by reducing the power flow), it may be sensible to reduce the structure length. A length of 0.6-m seems to be a good compromise between cost and reducing breakdown energy. However, high power tests are needed to verify these various possibilities.

One concern in the wakefield design with a shorter structure is the fewer modes in the dipole spectrum, which may weaken the de-coherent cancellation among the modes. This wakefield issue will not be addressed here.

2 Low v_g structures

Three types of low v_g , $5\pi/6$ phase advance structures were studied. The main RF parameters of these structures are listed in Table 1. The gradients were calculated with a nominal input power of 97-MW/m and loading current of 0.9-amps. Both the vg3 and vg5 0.9-m structures can produce an unloaded gradient of 70-MV/m. The vg3 0.6-m structure has a lower unloaded gradient. The loaded gradient for these three designs are all above 50-MV/m. Notice that the input power per structure for the 0.6-m design is 30% less.

3 Bandwidth, structure dispersive effects

The dispersive effect is a concern in the low v_g design because of the narrower bandwidth associated with the low v_g and high phase advance. The possible consequence of this effect is the distortions to the RF pulse, which may induce a large energy variation across the bunch train. The dispersive effects of these structures were studied. Fig. 4

shows a snapshot of the E_z field in the vg5 0.9-m structure at $t=100$ -ns. The smooth curve (dashed) is the RF pulse with the dispersive effect off. The solid curve is the RF pulse with the dispersive effect on. The acceleration is an integral of this field. Simulations show that the energy jitter caused by the dispersive effect is not significant and is within tolerances.

Table 1 Parameters for three low v_g structures.

Parameters	Vg3_60	Vg3_90	Vg5_90
L_{struct} (m)	0.601	0.908	0.908
N_{cell}	55	83	83
T_f (ns)	110	120	121
τ	0.529	0.515	0.508
v_g/c (%)	3.16-1.05	3.20-2.10	5.06-1.14
$F_{1,c}$ (GHz)/ $0.1/4\sigma$	15.20	15.27	15.18
Power in (MW)	58.85	87.5	87.5
G_L/G_{UNL} (MV/m)	51.1/64.7	53.5/69.3	54.6/70.0

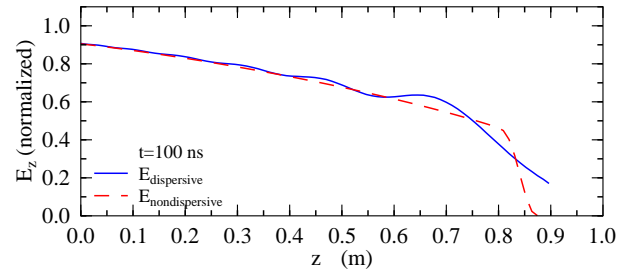


Figure 4 A snapshot E_z fields in the vg5 0.9-m structure: solid) dispersive on; dashed) dispersive off.

SUMMARY

In this paper, we have presented ideas of using phase advance as an additional parameter to optimize both the dipole and the fundamental modes, and showed that low group velocity structures can be designed with high RF efficient using a high phase advance mode.

The authors would like to acknowledge the structures and the NLC linac group meetings for helpful discussions and support.

REFERENCES

- [1] ZDR report for the Next Linear Collider, LBNL-PUB-5424, SLAC Report 474, UCRL-ID-124161, 1996.
- [2] G. Stupakov and Z. Li, Varying a/λ in NLC Structures – BNS Damping and Emittance Growth, LCC-0063.
- [3] C. Adolphsen, NLCTA Structure Operation Results, Structure Breakdown Workshop, SLAC, August 2000.
- [4] K. Bane and Z. Li, Dipole Mode Detuning in the Injector Linacs of the NLC, SLAC-AP-134, LCC-0043, Dec. 2000
- [5] Z. Li, et al, RDDS1 Cell Design and Optimization for the Linear Collider Linacs, proceedings of PAC1999, New York, 1999.
- [6] J. Wang, et al, Design Fabrication and Measurement of the RDDS1 Structure, proceedings of LINAC2000, Monterey, CA, 2000.